

## FEATURES:

- ✓ Architectural linear luminaire with direct or direct/indirect distribution.
- ✓ Light source: LED board 11".
- ✓ Dark Optic provides superior lighting distribution with precise low glare illumination.
- ✓ Offered with Regular 50°/10UGR or Flood 80°/15UGR internal optic.
- ✓ Suitable for surface, suspended and recessed installations.
- ✓ Extruded aluminum body comes with white, black or grey finish.
- ✓ LED Strips are rated for 60,000hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

## SPECIFICATION:

**ED SQUARE+**  -  -  -  -  -  -  -  -  -  -  -

Enter the Product Code into the boxes above.

- |   |  |   |  |   |   |
|---|--|---|--|---|---|
| <b>TYPE</b><br><input type="checkbox"/> DO - Dark Optic | <b>SIZE</b><br><input type="checkbox"/> 2x2 Feet<br><input type="checkbox"/> 3x3 Feet<br><input type="checkbox"/> 4x4 Feet<br><input type="checkbox"/> <input type="text"/> *<br><small>* Specify required length.</small> | <b>SOURCE</b><br><input type="checkbox"/> 25WLED<br><input type="checkbox"/> 50WLED<br><input type="checkbox"/> 75WLED*<br><small>* Available for 3 &amp; 4 Feet.</small> | <b>RADIANCE</b><br><input type="checkbox"/> DD - Direct (100%Down)<br><input type="checkbox"/> UD - Uneven(70%Down/30%Up)**<br><small>*Light Distribution.<br/>**Suspended Configuration only.</small> | <b>VOLTAGE</b><br><input type="checkbox"/> 120V<br><input type="checkbox"/> 277V<br><input type="checkbox"/> 347V*<br><small>*Not available for all configurations.</small> | <b>DRIVER</b><br><input type="checkbox"/> ST - Standard (Non-Dimming)<br><input type="checkbox"/> DL - 0-10V Dimming (1%)<br><input type="checkbox"/> DA - DALI<br><input type="checkbox"/> <input type="text"/> *<br><small>* Please specify dimming method (ELV).</small> |
|---|--|---|--|---|---|

- |   |  |   |   |   |
|---|--|---|---|---|
| <b>MOUNTING</b><br><input type="checkbox"/> S4-Suspension 4Feet<br><input type="checkbox"/> S6-Suspension 6Feet<br><input type="checkbox"/> S <input type="text"/> Feet*<br><input type="checkbox"/> SF - Surface Mount<br><input type="checkbox"/> RT - Recessed Trimless<br><small>*Please specify required Length.</small> | <b>REFLECTOR</b><br><input type="checkbox"/> WH - White<br><input type="checkbox"/> BK - Black<br><input type="checkbox"/> SL - Silver | <b>LENS</b><br><input type="checkbox"/> RB - Regular 50°<br><input type="checkbox"/> FB - Flood 80° | <b>FINISH</b><br><input type="checkbox"/> WH - White<br><input type="checkbox"/> BK - Black<br><input type="checkbox"/> GR - Grey<br><input type="checkbox"/> CF - Custom <input type="text"/> RAL# | <b>CCT</b><br><input type="checkbox"/> 30K - 3000Kelvin/90CRI<br><input type="checkbox"/> 35K - 3500Kelvin/90CRI<br><input type="checkbox"/> 40K - 4000Kelvin/90CRI |
|---|--|---|---|---|

## LUMEN OUTPUT:



Watts	30K	35K	40K
25W	3570 lm	3660 lm	3750 lm
50W	5800 lm	5950 lm	6100 lm
75W	8825 lm	9025 lm	9225 lm



**Project:**

**Type:**

**SIZE:**

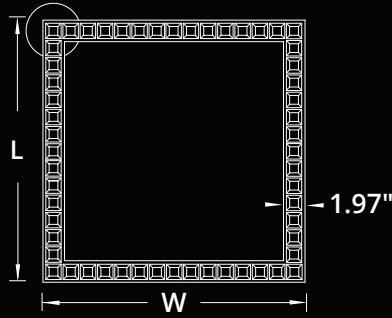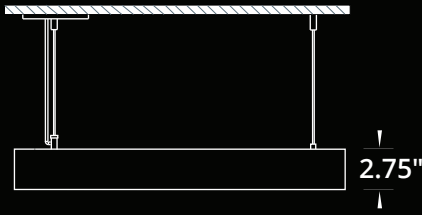

Size	L x W
2x2x2 Feet	23.95 x 23.95 Inch
3x3x3 Feet	34.93 x 34.93 Inch
4x4x4 Feet	45.93 x 45.93 Inch

**RADIANCE:**


**DIRECT DISTRIBUTION**




**UNEVEN DISTRIBUTION**




**MOUNTING:**

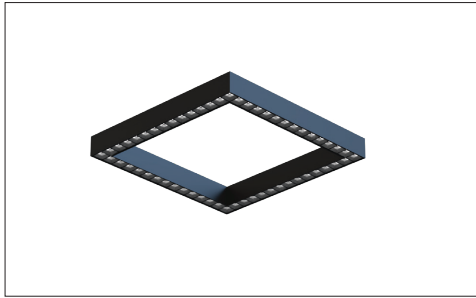


SURFACE MOUNT

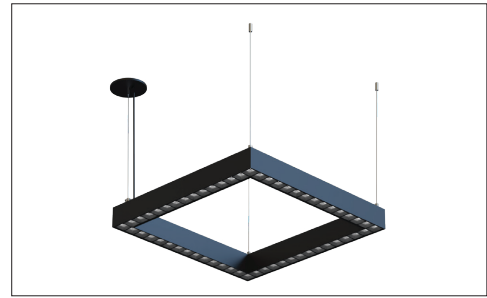

SUSPENDED

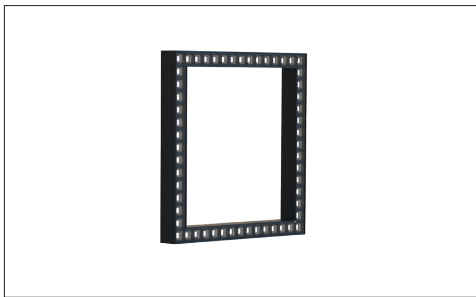

SURFACE MOUNT

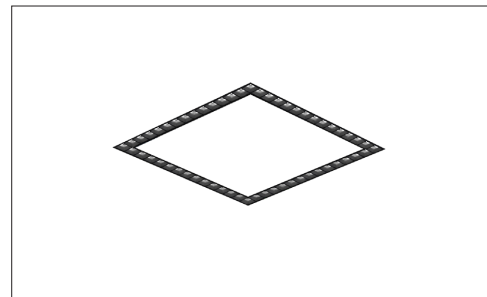

RECESSED TRIMLESS