


**FEATURES:**

- ✓ Architectural linear luminaire with direct or direct/indirect distribution.
- ✓ Light source: LED board (5.5"/11"/22"/24").
- ✓ Even illumination is provided by variety of high efficiency optic lenses.
- ✓ Available for row mounted installations in various lengths.
- ✓ Suitable for surface,suspended,recessed and damp area installations.
- ✓ Extruded aluminum body comes with white, black or grey finish.
- ✓ Also available with various custom color options.
- ✓ LED Strips are rated for 60,000hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

**SPECIFICATION:**



Enter the Product Code into the boxes above.

<p><b>SIZE</b></p> <p>____ Feet</p>	<p><b>SOURCE</b></p> <p><input type="checkbox"/> 5W/Ft LED</p> <p><input type="checkbox"/> 7W/Ft LED</p> <p><input type="checkbox"/> 10W/Ft LED</p>	<p><b>RADIANCE</b></p> <p><input type="checkbox"/> DD - Direct (100%Down)</p> <p><input type="checkbox"/> ID - Indirect (100%Up)**</p> <p><input type="checkbox"/> UD - Uneven(70%Down/30%Up)**</p> <p><small>*Light Distribution. **Not available for Surface Mount Configuration.</small></p>	<p><b>VOLTAGE</b></p> <p><input type="checkbox"/> 120V</p> <p><input type="checkbox"/> 277V</p> <p><input type="checkbox"/> 347V*</p> <p><small>*Not available for all configurations.</small></p>	<p><b>DRIVER</b></p> <p><input type="checkbox"/> ST - Standard</p> <p><input type="checkbox"/> DL - 0-10V Dimming (1%)</p> <p><input type="checkbox"/> DA - DALI</p> <p><input type="checkbox"/> WZ - Wiz***</p> <p><input type="checkbox"/> <input type="text"/>*</p> <p><input type="checkbox"/> EC - Emergency Circuit</p> <p><input type="checkbox"/> EM - Emergency**</p> <p><small>* Please specify dimming method (ELV). **Battery Pack per 4Feet section. ***Remote driver only.</small></p>	<p><b>MOUNTING</b></p> <p><input type="checkbox"/> S4-Suspension 4Feet</p> <p><input type="checkbox"/> S6-Suspension 6Feet</p> <p><input type="checkbox"/> S <input type="text"/>Feet*</p> <p><input type="checkbox"/> WM - Wall Mount</p> <p><input type="checkbox"/> WF - Wall Flush</p> <p><input type="checkbox"/> SF - Surface Mount</p> <p><input type="checkbox"/> RT - Recessed Trimless</p> <p><small>*Please specify required Length.</small></p>
-------------------------------------	---	---	--	--	---

<p><b>LENS</b></p> <p><input type="checkbox"/> OP - Opal</p> <p><input type="checkbox"/> WW - Wall Wash</p> <p><input type="checkbox"/> PR - Prismatic</p> <p><input type="checkbox"/> BL - Black Lens</p> <p><input type="checkbox"/> AR - Aluminum Reflector*</p> <p><small>* Available for 4Feet only (Actual length included).</small></p>	<p><b>FINISH</b></p> <p><input type="checkbox"/> WH - White</p> <p><input type="checkbox"/> BK - Black</p> <p><input type="checkbox"/> GR - Grey</p> <p><input type="checkbox"/> CF - Custom <input type="text"/>RAL#</p>	<p><b>CCT</b></p> <p><input type="checkbox"/> 30K - 3000Kelvin/90CRI</p> <p><input type="checkbox"/> 35K - 3500Kelvin/90CRI</p> <p><input type="checkbox"/> 40K - 4000Kelvin/90CRI</p> <p><input type="checkbox"/> RGBW</p> <p><input type="checkbox"/> TW - Tunable White** (2700K-6500K)</p> <p><small>*Other options are available. **Available with 0-10V,Dali or Bluetooth controls.</small></p>	<p><b>OPTIONS</b></p> <p><input type="checkbox"/> No Options*</p> <p><input type="checkbox"/> DR - Damp Rated</p> <p><input type="checkbox"/> DS - Daylight Sensor</p> <p><input type="checkbox"/> DC - Dual Circuit**</p> <p><input type="checkbox"/> OS - Occupancy Sensor</p> <p><input type="checkbox"/> DOS - Daylight &amp; Occupancy Sensor</p> <p><small>*Leave Empty. **Down /Up Control separately. ***Combination example (DR/DS).</small></p>
--	---	---	---


**LUMEN OUTPUT W/Ft:**

Watts	30K	35K	40K
5W	515 lm	525 lm	535 lm
7W	720 lm	735 lm	750 lm
10W	1030lm	1050 lm	1080 lm

**Project:**

**Type:**

**SIZE:**

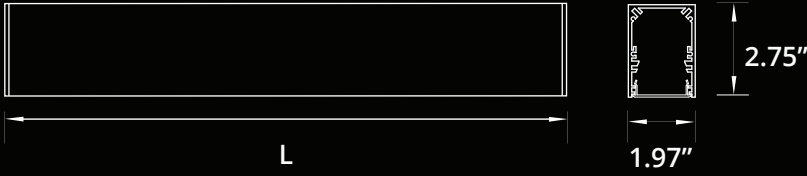

Size	L (LENGTH)
1 Feet	11.780 Inch
2 Feet	24.530 Inch
3 Feet	35.530 Inch
4 Feet	48.280 Inch
5 Feet	59.280 Inch
6 Feet	72.030 Inch
7 Feet	83.030 Inch
8 Feet	95.780 Inch

**RADIANCE:**


**DIRECT DISTRIBUTION**




**UNEVEN DISTRIBUTION**




**MOUNTING:**

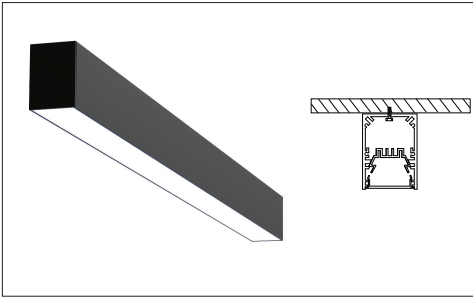


**SURFACE MOUNT**

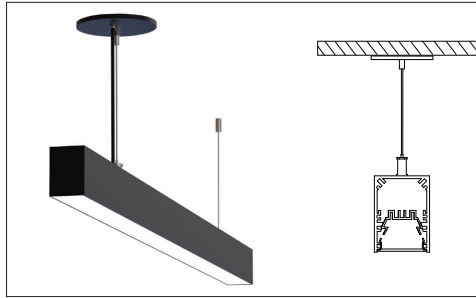


**SUSPENDED**

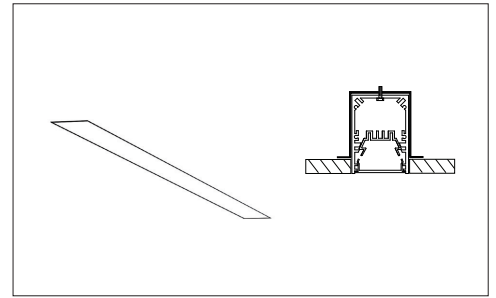


**RECESSED TRIMLESS**

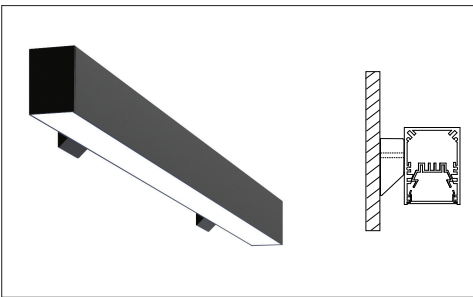

**WALL MOUNT**

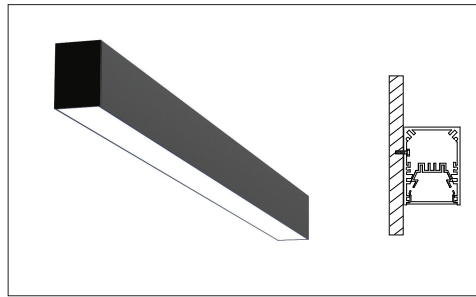

**WALL FLUSH**

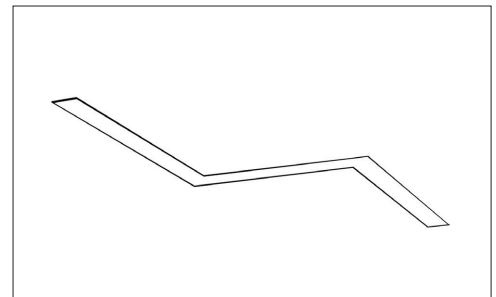

**90° LEFT/90° RIGHT**