

FEATURES:

- ✓ Architectural linear luminaire with direct distribution.
- ✓ Light source: 11" LED Modular board.
- ✓ Dark Optic provides superior lighting distribution with precise low glare illumination.
- ✓ Offered with regular 50°/16UGR, flood 80°/19UGR or asymmetric beam angle.
- ✓ Available for row mounted installations in various lengths.
- ✓ Suitable for recessed installation in to drywall or T-Bar.
- ✓ Extruded aluminum body comes with white, black or grey finish.
- ✓ Also available with custom color options.
- ✓ LED's are rated for 60,000hrs. L80 with +90CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards. **reinventlight**

SPECIFICATION:

ED VECTOR+ - - - - - - - - - - - -

Enter the Product Code into the boxes above.

- | | | | | | |
|--|---|---|--|--|--|
| <p>TYPE</p> <p><input type="checkbox"/> DO - Dark Optic</p> | <p>SIZE</p> <p>_____ Feet*</p> <p><small>* 1Foot increment only.</small></p> | <p>SOURCE</p> <p><input type="checkbox"/> 5W/Ft LED</p> <p><input type="checkbox"/> 7W/Ft LED</p> <p><input type="checkbox"/> 10W/Ft LED</p> | <p>RADIANCE</p> <p><input type="checkbox"/> DD - Direct (100%Down)</p> <p><small>*Light Distribution.</small></p> | <p>VOLTAGE</p> <p><input type="checkbox"/> 120V</p> <p><input type="checkbox"/> 277V</p> <p><input type="checkbox"/> 347V*</p> <p><small>*Not available for all configurations.</small></p> | <p>DRIVER</p> <p><input type="checkbox"/> ST - Standard</p> <p><input type="checkbox"/> DL - 0-10V Dimming (1%)</p> <p><input type="checkbox"/> DA - DALI</p> <p><input type="checkbox"/> <input type="text"/>*</p> <p><input type="checkbox"/> EC - Emergency Circuit</p> <p><small>* Please specify dimming method (Phase).</small></p> |
|--|---|---|--|--|--|

- | | | | | | |
|--|---|--|--|--|---|
| <p>MOUNTING</p> <p><input type="checkbox"/> RS - Recessed</p> <p><input type="checkbox"/> RB - Recessed T-Bar</p> | <p>REFLECTOR</p> <p><input type="checkbox"/> WH - White</p> <p><input type="checkbox"/> BK - Black</p> <p><input type="checkbox"/> SL - Silver</p> | <p>LENS</p> <p><input type="checkbox"/> RB - Regular 50°</p> <p><input type="checkbox"/> FB - Flood 80°</p> <p><input type="checkbox"/> AB - Asymmetric</p> | <p>FINISH</p> <p><input type="checkbox"/> WH - White</p> <p><input type="checkbox"/> BK - Black</p> <p><input type="checkbox"/> GR - Grey</p> <p><input type="checkbox"/> CF - Custom <input type="text" value="RAL#"/></p> | <p>CCT</p> <p><input type="checkbox"/> 30K - 3000Kelvin/90CRI</p> <p><input type="checkbox"/> 35K - 3500Kelvin/90CRI</p> <p><input type="checkbox"/> 40K - 4000Kelvin/90CRI</p> | <p>OPTIONS</p> <p><input type="checkbox"/> No Options*</p> <p><input type="checkbox"/> CB - Casambi BT</p> <p><small>*Leave Empty.</small></p> |
|--|---|--|--|--|---|

LUMEN OUTPUT W/Ft:


Watts	30K	35K	40K
5W	610 lm	625 lm	640 lm
7W	855 lm	875 lm	895 lm
10W	1225lm	1250 lm	1275 lm

Project:

Type:

Specifications are subject to change without notice. Every effort has been made for accuracy and errors are unintentional.

SIZE:

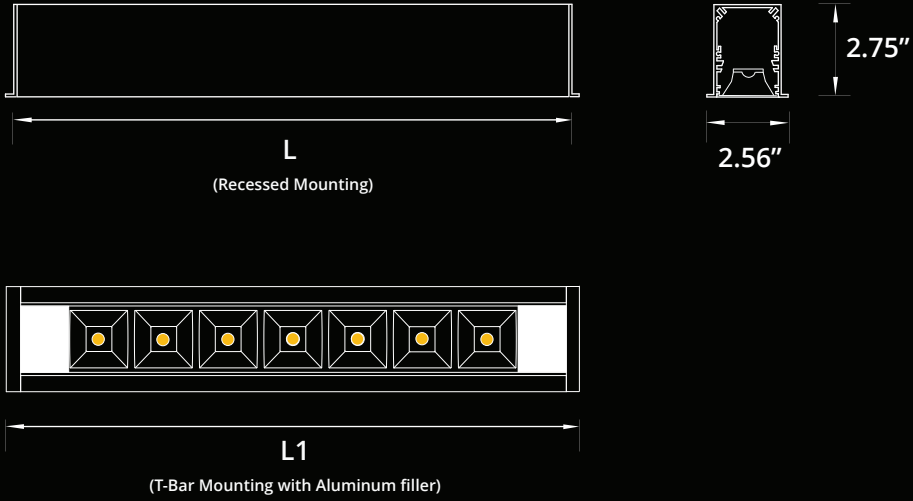


Size	L(CUTOUT)	L1(T-BAR)	LED Strips
1 Feet	11.155 Inch	11.750 Inch	1x11"
2 Feet	22.138 Inch	23.750 Inch	2x11"
3 Feet	33.121 Inch	35.750 Inch	3x11"
4 Feet	44.104 Inch	47.750 Inch	4x11"
5 Feet	55.087 Inch	59.750 Inch	5x11"
6 Feet	66.070 Inch	71.750 Inch	6x11"
7 Feet	77.053 Inch	83.750 Inch	7x11"
8 Feet	88.036 Inch	95.750 Inch	8x11"


RADIANCE:



MOUNTING:

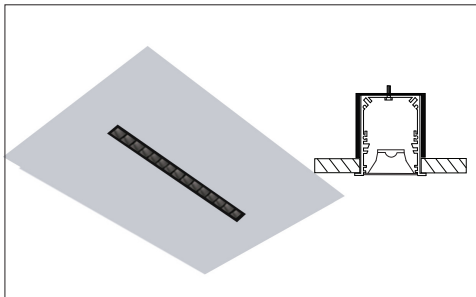


RECESSED

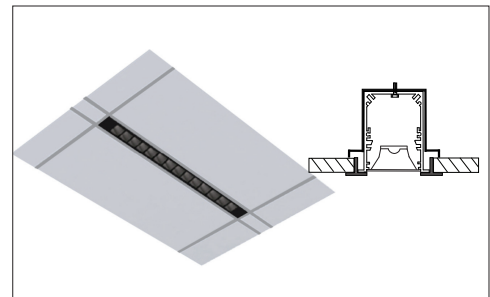


RECESSED T-BAR


BEAMS:

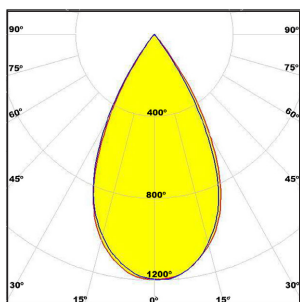

REGULAR BEAM

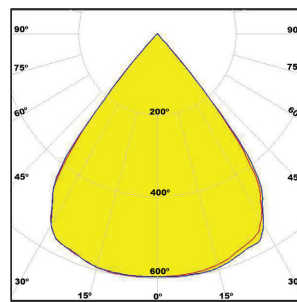

FLOOD BEAM

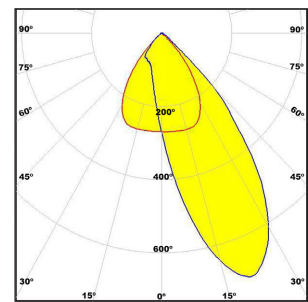

ASYMMETRIC BEAM