
FEATURES:

- ✓ Architectural Y-shaped luminaire with direct lighting distribution.
- ✓ Light source: LED board 11".
- ✓ Dark Optic provides superior lighting distribution with precise low glare illumination.
- ✓ Offered with Regular 50°/10UGR or Flood 80°/15UGR internal optic.
- ✓ Suitable for surface, suspended and recessed installations.
- ✓ Extruded aluminum body comes with white, black or grey finish.
- ✓ LED Strips are rated for 60,000hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

SPECIFICATION:
ED TRIAD+

 -
 -
 -
 -
 -
 -
 -
 -
 -
 -

Enter the Product Code into the boxes above.

- | | | | | | |
|---|--|---|---|---|---|
| TYPE
<input type="checkbox"/> DO - Dark Optic | SIZE
<input type="checkbox"/> 2x2x2 Feet
<input type="checkbox"/> 3x3x3 Feet
<input type="checkbox"/> 4x4x4 Feet
<input type="checkbox"/> <input type="text"/> *
<small>* Specify required length.</small> | SOURCE
<input type="checkbox"/> 25WLED
<input type="checkbox"/> 50WLED
<input type="checkbox"/> 75WLED*
<small>* Available for 3 & 4 Feet.</small> | RADIANCE
<input type="checkbox"/> DD - Direct (100%Down)
<small>*Light Distribution.</small> | VOLTAGE
<input type="checkbox"/> 120V
<input type="checkbox"/> 277V
<input type="checkbox"/> 347V*
<small>*Not available for all configurations.</small> | DRIVER
<input type="checkbox"/> ST - Standard (Non-Dimming)
<input type="checkbox"/> DL - 0-10V Dimming (1%)
<input type="checkbox"/> DA - DALI
<input type="checkbox"/> <input type="text"/> *
<small>* Please specify dimming method (ELV).</small> |
|---|--|---|---|---|---|

- | | | | | |
|---|--|---|---|---|
| MOUNTING
<input type="checkbox"/> S4-Suspension 4Feet
<input type="checkbox"/> S6-Suspension 6Feet
<input type="checkbox"/> S <input type="text"/> Feet*
<input type="checkbox"/> SF - Surface Mount
<input type="checkbox"/> RT - Recessed Trimless
<small>*Please specify required Length.</small> | REFLECTOR
<input type="checkbox"/> WH - White
<input type="checkbox"/> BK - Black
<input type="checkbox"/> SL - Silver | LENS
<input type="checkbox"/> RB - Regular 50°
<input type="checkbox"/> FB - Flood 80° | FINISH
<input type="checkbox"/> WH - White
<input type="checkbox"/> BK - Black
<input type="checkbox"/> GR - Grey
<input type="checkbox"/> CF - Custom <input type="text"/> RAL# | CCT
<input type="checkbox"/> 30K - 3000Kelvin/90CRI
<input type="checkbox"/> 35K - 3500Kelvin/90CRI
<input type="checkbox"/> 40K - 4000Kelvin/90CRI |
|---|--|---|---|---|


LUMEN OUTPUT:

Watts	30K	35K	40K
25W	3570 lm	3660 lm	3750 lm
50W	5800 lm	5950 lm	6100 lm
75W	8825 lm	9025 lm	9225 lm



Project:	<input type="text"/>
Type:	<input type="text"/>

SIZE:

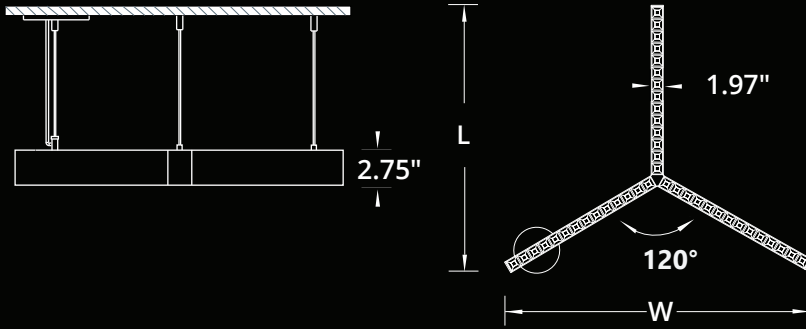


Size	L x W
2x2x2 Feet	34.970 x 40.380 Inch
3x3x3 Feet	51.460 x 59.420 Inch
4x4x4 Feet	67.940 x 78.460 Inch

RADIANCE:


DIRECT DISTRIBUTION




MOUNTING:

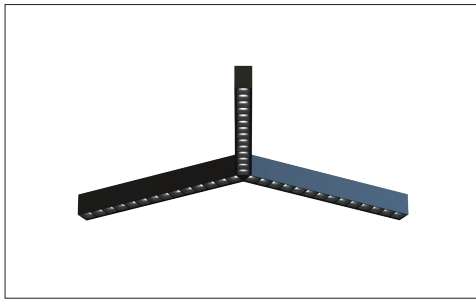


SURFACE MOUNT

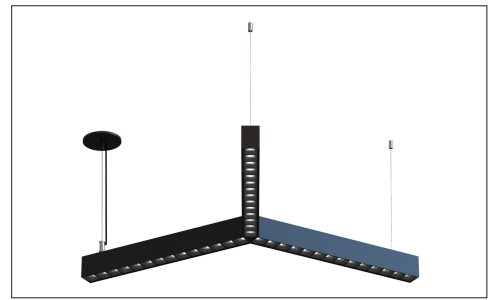

SUSPENDED

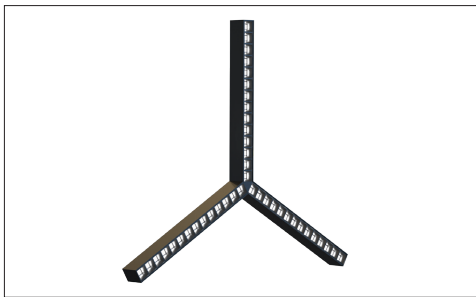

SURFACE MOUNT

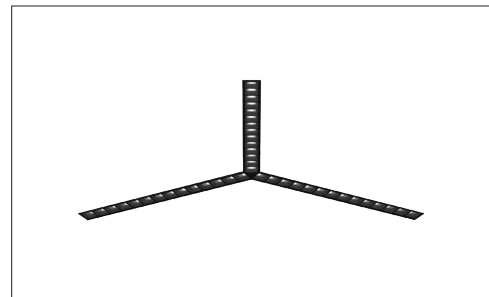

RECESSED TRIMLESS