


**FEATURES:**

- ✓ Architectural luminaire with direct lighting distribution.
- ✓ Light source: COB LED.
- ✓ Built in frosted lens controls the light and reduce the glare.
- ✓ Available with standard or asymmetric semi specular reflector.
- ✓ Round trim comes in white, black and grey color.
- ✓ Suitable for recessed non insulated ceilings or damp locations.
- ✓ LED Spot is rated for 60,000hrs. L70 with +85 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

**SPECIFICATION:**

**ED LR+**  SIZE  SOURCE  VOLTAGE  DRIVER  HOUSING  REFLECTOR  TRIM  CCT  OPTIONS

Enter the Product Code into the boxes above.

**SIZE**

- 4 Inch
- 6 Inch

**SOURCE**

- 10W LED
  - 20W LED
  - 30W LED\*
- \* Not available for 4 Inch.

**VOLTAGE**

- 120V
  - 277V
  - 347V\*
- \* Not available for all configurations.

**DRIVER**

- ST - Standard
- DL - 0-10V Dimming (1%)
- DA - DALI
- EM - Emergency
- \*

\* Please specify dimming method (ELV).

**HOUSING**

- NC - New Const. Plate
- RT - Retrofit

**REFLECTOR**

- ST - Standard
- AS - Asymmetric\*

\* Available for 4 Inch trim only.

**TRIM**

- WH - White
- BK - Black
- GR - Grey

**CCT**

- 30K - 3000Kelvin
- 35K - 3500Kelvin
- 40K - 4000Kelvin
- TW - Tunable White\*\* (2700K-6500K)

\*Other options are available.  
 \*\*Available with Dali controls.

**OPTIONS**

- No Options\*
- 90 CRI


\*Leave Empty.

**DIMENSIONS:**

Size	4 Inch	6 Inch
Width	6.250"	7.875"
Height	4.875"	5.875"
Cutout	5.000"	6.500"

**LUMEN OUTPUT:**

Watts	30K	35K	40K
10W	1050 lm	1100 lm	1125 lm
20W	1915 lm	1950 lm	1985 lm
30W	2950 lm	3010 lm	3070 lm

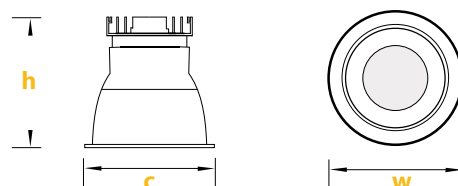

Project:

Type: