

## FEATURES:

- ✓ Architectural linear luminaire with direct or direct/indirect distribution.
- ✓ Light source: 11" LED Modular board.
- ✓ Dark Optic provides superior lighting distribution with precise low glare illumination.
- ✓ Offered with regular 50°/16UGR, flood 80°/19UGR or asymmetric beam angle.
- ✓ Available for row mounted installations in various lengths.
- ✓ Suitable for surface, suspended, recessed and wall mount installations.
- ✓ Extruded aluminum body comes with white, black or grey finish.
- ✓ Also available with custom color options.
- ✓ LED's are rated for 60,000hrs. L80 with +90CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards. **reinventlight**

## SPECIFICATION:

**ED VECTOR+**  -  -  -  -  -  -  -  -  -  -  -  -

Enter the Product Code into the boxes above.

- |   |   |  |  |   |  |
|---|---|--|--|---|--|
| <b>TYPE</b><br><input type="checkbox"/> DO - Dark Optic | <b>SIZE</b><br><input type="text"/> Feet*<br><small>* 1Foot increment only.</small> | <b>SOURCE</b><br><input type="checkbox"/> 5W/Ft LED<br><input type="checkbox"/> 7W/Ft LED<br><input type="checkbox"/> 10W/Ft LED | <b>RADIANCE</b><br><input type="checkbox"/> DD - Direct (100%Down)<br><input type="checkbox"/> UD - Uneven(70%Down/30%Up)**<br><small>*Light Distribution.<br/>**Suspended Configuration only.</small> | <b>VOLTAGE</b><br><input type="checkbox"/> 120V<br><input type="checkbox"/> 277V<br><input type="checkbox"/> 347V*<br><small>*Not available for all configurations.</small> | <b>DRIVER</b><br><input type="checkbox"/> ST - Standard<br><input type="checkbox"/> DL - 0-10V Dimming (1%)<br><input type="checkbox"/> DA - DALI<br><input type="checkbox"/> <input type="text"/> *<br><input type="checkbox"/> EC - Emergency Circuit<br><small>* Please specify dimming method (Phase).</small> |
|---|---|--|--|---|--|

- |   |  |   |   |   |   |
|---|--|---|---|---|---|
| <b>MOUNTING</b><br><input type="checkbox"/> S4-Suspension 4Feet<br><input type="checkbox"/> S6-Suspension 6Feet<br><input type="checkbox"/> S <input type="text"/> Feet*<br><input type="checkbox"/> WM - Wall Mount<br><input type="checkbox"/> WF - Wall Flush<br><input type="checkbox"/> SF - Surface Mount<br><input type="checkbox"/> RT - Recessed Trimless<br><small>*Please specify required Length.</small> | <b>REFLECTOR</b><br><input type="checkbox"/> WH - White<br><input type="checkbox"/> BK - Black<br><input type="checkbox"/> SL - Silver | <b>LENS</b><br><input type="checkbox"/> RB - Regular 50°<br><input type="checkbox"/> FB - Flood 80°<br><input type="checkbox"/> AB - Asymmetric | <b>FINISH</b><br><input type="checkbox"/> WH - White<br><input type="checkbox"/> BK - Black<br><input type="checkbox"/> GR - Grey<br><input type="checkbox"/> CF - Custom <input type="text"/> RAL# | <b>CCT</b><br><input type="checkbox"/> 30K - 3000Kelvin/90CRI<br><input type="checkbox"/> 35K - 3500Kelvin/90CRI<br><input type="checkbox"/> 40K - 4000Kelvin/90CRI | <b>OPTIONS</b><br><input type="checkbox"/> No Options*<br><input type="checkbox"/> DC - Dual Circuit**<br><small>*Leave Empty.<br/>**Down /Up Control separately.</small> |
|---|--|---|---|---|---|

## LUMEN OUTPUT W/Ft:


Watts	30K	35K	40K
5W	610 lm	625 lm	640 lm
7W	855 lm	875 lm	895 lm
10W	1225lm	1250 lm	1275 lm

**Project:**

**Type:**

Specifications are subject to change without notice. Every effort has been made for accuracy and errors are unintentional.

## SIZE:

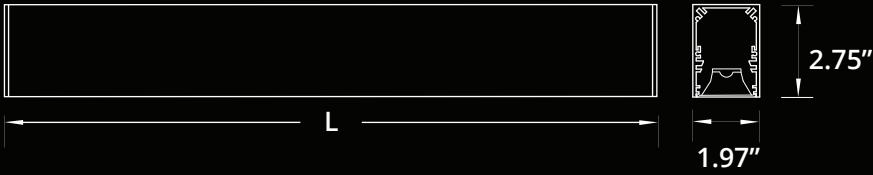

Size	L (LENGTH)	LED Strips
1 Feet	11.311 Inch	1x11"
2 Feet	22.294 Inch	2x11"
3 Feet	33.277 Inch	3x11"
4 Feet	44.260 Inch	4x11"
5 Feet	55.243 Inch	5x11"
6 Feet	66.226 Inch	6x11"
7 Feet	77.209 Inch	7x11"
8 Feet	88.192 Inch	8x11"

## RADIANCE:


### DIRECT DISTRIBUTION




### UNEVEN DISTRIBUTION




## MOUNTING:

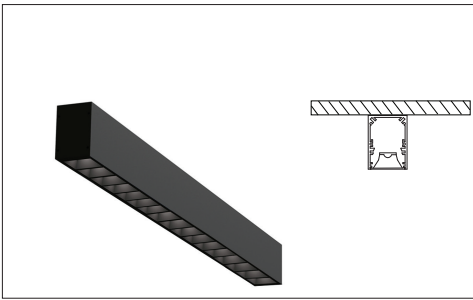

SURFACE MOUNT

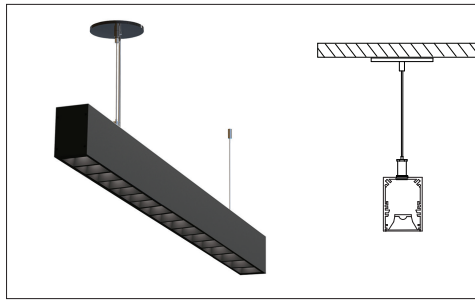


SUSPENDED

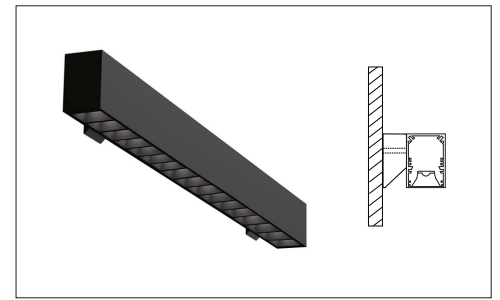


WALL MOUNT


## BEAMS:

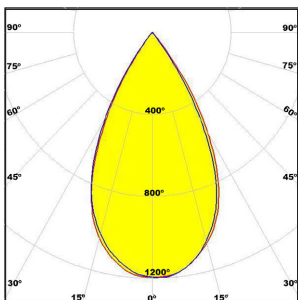

REGULAR BEAM

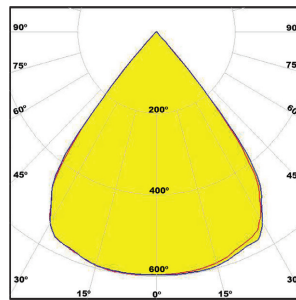

FLOOD BEAM

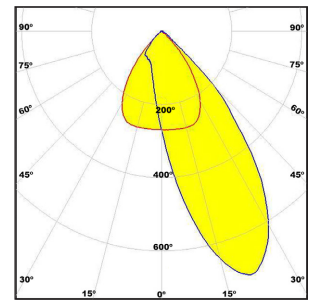

ASYMMETRIC BEAM