



FEATURES:

- ✓ Architectural sound absorbing Eco Felt Acoustic panel.
- ✓ Made from recyclable plastic material available in different thicknesses.
- ✓ Class1 Fire rated with 0.7 Noise Reduction Coefficient/1" Acoustic.
- ✓ Light source: COB LED.
- ✓ High efficiency integral reflector combined with opal lens insert provides excellent lighting distribution.
- ✓ Square internal louver is available in a wide range of finishes.
- ✓ Aluminum body of the luminaire comes with built-in-driver.
- ✓ LED Spot is rated for 60,000hrs. L70 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards. **reinventlight**


SPECIFICATION:

Sonic CUBIC+ - - - - - - - - - - - -

Enter the Product Code into the boxes above.

- | | | | | |
|---|---|---|--|---|
| TYPE
<input type="checkbox"/> BS - Box | HEIGHT
<input type="checkbox"/> 12 Inch
<input type="checkbox"/> 16 Inch
<input type="checkbox"/> 24 Inch | SOURCE
<input type="checkbox"/> 15W LED
<input type="checkbox"/> 20W LED
<input type="checkbox"/> 25W LED | RADIANCE
<input type="checkbox"/> DD - Direct (100%Down)
<small>*Light Distribution.</small> | VOLTAGE
<input type="checkbox"/> 120V
<input type="checkbox"/> 277V |
| DRIVER
<input type="checkbox"/> ST - Standard (Non-Dimming)
<input type="checkbox"/> DL - 0-10V Dimming (1%)
<input type="checkbox"/> DA - DALI
<input type="checkbox"/> BT - Bluetooth
<input type="checkbox"/> <input type="text"/> *
<small>*Please specify dimming method.</small> | MOUNTING
<input type="checkbox"/> S4-Suspension 4Feet
<input type="checkbox"/> S6-Suspension 6Feet
<input type="checkbox"/> S <input type="text"/> Feet*
<small>*Please specify required Length.</small> | LOUVER
<input type="checkbox"/> WH - White
<input type="checkbox"/> BK - Black | ED CUBIC FINISH
<input type="checkbox"/> WH - White
<input type="checkbox"/> BK - Black
<input type="checkbox"/> GR - Grey*
<small>*Supply with White Cord & Canopy</small> | CCT
<input type="checkbox"/> 30K/90CRI - 3000Kelvin
<input type="checkbox"/> 35K/90CRI - 3500Kelvin
<input type="checkbox"/> 40K/90CRI - 4000Kelvin
<small>*Other options are available.</small> |

ACOUSTIC FINISH*

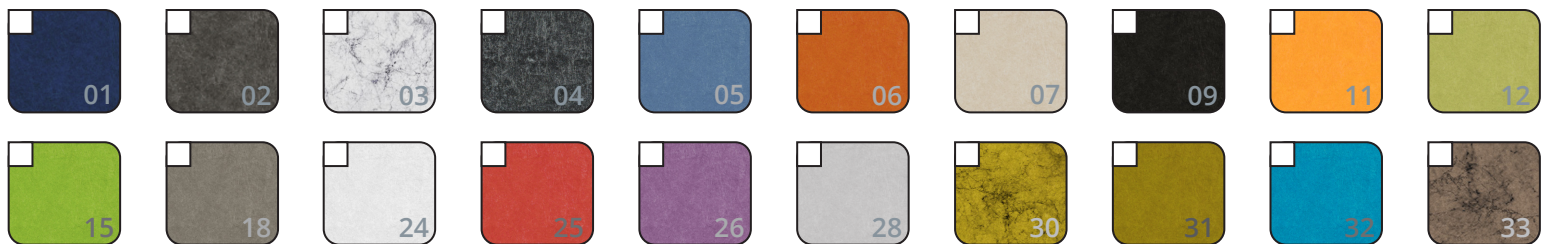

* Please specify Sides, for example (09/15)

LUMEN OUTPUT:

Watts	30K	35K	40K
15W	1400 lm	1430 lm	1460 lm
20W	1910 lm	1950 lm	1990 lm
25W	2350 lm	2400 lm	2450 lm




Project:

Type:

SIZE:

L - Length	W - Width	H - Height
12.00 Inch	12.00 Inch	12.00 Inch = 11.75 Inch
16.00 Inch	16.00 Inch	16.00 Inch = 15.75 Inch
24.00 Inch	24.00 Inch	24.00 Inch = 23.75 Inch

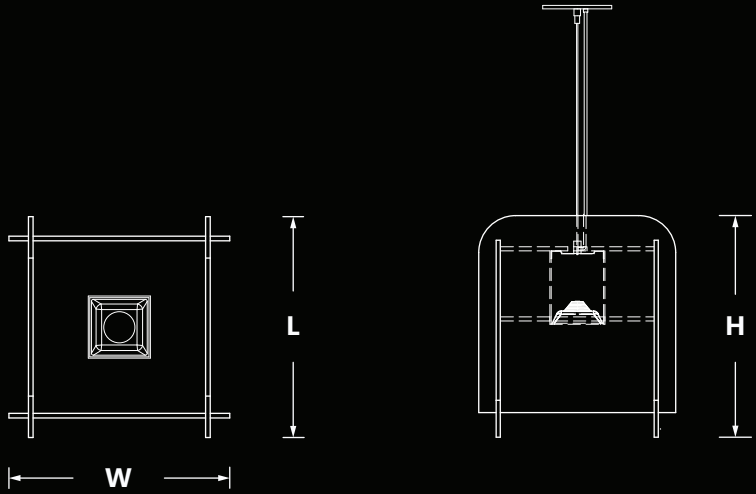

FINISHES:



(06/26)




(25/01)



(09/15)



(02/01)

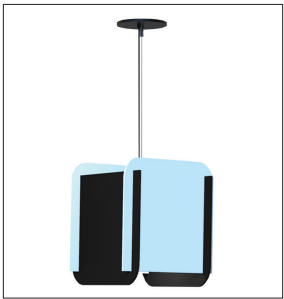

(05/09)



(06/12)



(25/03)



(01/12)