


FEATURES:

- ✓ Architectural linear luminaire with direct or direct/indirect distribution.
- ✓ Light source: LED Module.
- ✓ Unique Multioptic lens provide superior lighting distribution with regular 60°, wide 110°, symmetric or asymmetric beam angle.
- ✓ Available for row mounted installations in various lengths.
- ✓ Suitable for surface, suspended, wall mount installations.
- ✓ Extruded aluminum body comes with white, black or grey finish.
- ✓ Also available with various custom color options.
- ✓ LED's are rated for 60,000hrs. L80 with +90CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

SPECIFICATION:



Enter the Product Code into the boxes above.

<p>SIZE</p> <p>_____ Feet</p>	<p>SOURCE</p> <p><input type="checkbox"/> 10W/Ft LED</p> <p><input type="checkbox"/> 15W/Ft LED</p> <p><input type="checkbox"/> 20W/Ft LED*</p> <p><small>* UD lighting distribution only.</small></p>	<p>RADIANCE</p> <p><input type="checkbox"/> DD - Direct (100%Down)</p> <p><input type="checkbox"/> UD - Uneven(70%Down/30%Up)**</p> <p><small>*Light Distribution. **Suspended Configuration only.</small></p>	<p>VOLTAGE</p> <p><input type="checkbox"/> 120V</p> <p><input type="checkbox"/> 277V</p> <p><input type="checkbox"/> 347V*</p> <p><small>*Not available for all configurations.</small></p>	<p>DRIVER</p> <p><input type="checkbox"/> ST - Standard</p> <p><input type="checkbox"/> DL - 0-10V Dimming (1%)</p> <p><input type="checkbox"/> DA - DALI</p> <p><input type="checkbox"/> <input type="text"/>*</p> <p><input type="checkbox"/> EC - Emergency Circuit</p> <p><input type="checkbox"/> EM - Emergency**</p> <p><small>* Please specify dimming method (ELV). **Battery Pack per 4Feet section.</small></p>
--------------------------------------	---	---	--	---

<p>MOUNTING</p> <p><input type="checkbox"/> S4-Suspension 4Feet</p> <p><input type="checkbox"/> S6-Suspension 6Feet</p> <p><input type="checkbox"/> S <input type="text"/> Feet*</p> <p><input type="checkbox"/> WM - Wall Mount</p> <p><input type="checkbox"/> WF - Wall Flush</p> <p><input type="checkbox"/> SF - Surface Mount</p> <p><small>*Please specify required Length.</small></p>	<p>FINISH</p> <p><input type="checkbox"/> WH - White</p> <p><input type="checkbox"/> BK - Black</p> <p><input type="checkbox"/> GR - Grey</p> <p><input type="checkbox"/> CF - Custom <input type="text"/> RAL#</p>	<p>LENS</p> <p><input type="checkbox"/> RB - Regular 60°</p> <p><input type="checkbox"/> WB - Wide 110°</p> <p><input type="checkbox"/> SB - Symmetric</p> <p><input type="checkbox"/> AB - Asymmetric</p>	<p>CCT</p> <p><input type="checkbox"/> 30K - 3000Kelvin/90CRI</p> <p><input type="checkbox"/> 35K - 3500Kelvin/90CRI</p> <p><input type="checkbox"/> 40K - 4000Kelvin/90CRI</p> <p><small>*Other options are available.</small></p>	<p>OPTIONS</p> <p><input type="checkbox"/> No Options*</p> <p><input type="checkbox"/> DS-Daylight Sensor</p> <p><input type="checkbox"/> DC - Dual Circuit**</p> <p><input type="checkbox"/> OS - Occupancy Sensor</p> <p><input type="checkbox"/> DOS - Daylight & Occupancy Sensor</p> <p><small>*Leave Empty. **Down /Up Control separately. ***Combination example (DS/DC).</small></p>
---	--	---	--	---


LUMEN OUTPUT W/Ft:

Watts	30K	35K	40K
10W	1280 lm	1310 lm	1340 lm
15W	1915 lm	1965 lm	2015 lm
20W	2554 lm	2620 lm	2686 lm

Project:

Type:

SIZE:

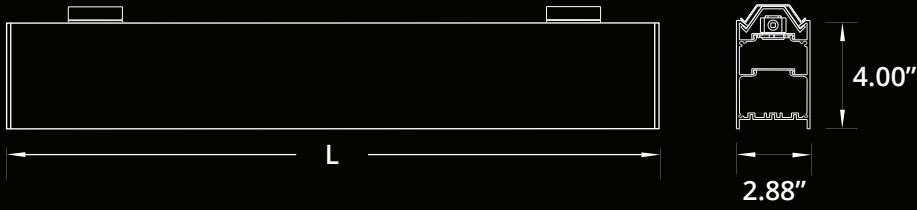

Size	L (LENGTH)	LED Strips
1 Feet	11.24 Inch	1x11"
2 Feet	23.00 Inch	2x11"
3 Feet	33.75 Inch	3x11"
4 Feet	45.50 Inch	4x11"
5 Feet	56.75 Inch	5x11"
6 Feet	68.00 Inch	6x11"
7 Feet	79.25 Inch	7x11"
8 Feet	90.25 Inch	8x11"

RADIANCE:


DIRECT DISTRIBUTION




UNEVEN DISTRIBUTION




MOUNTING:

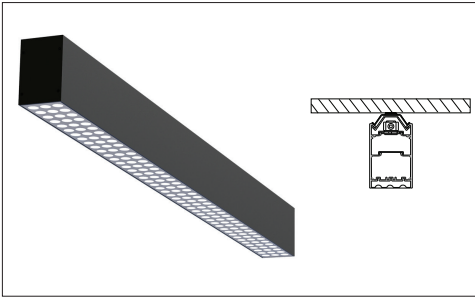

SURFACE MOUNT

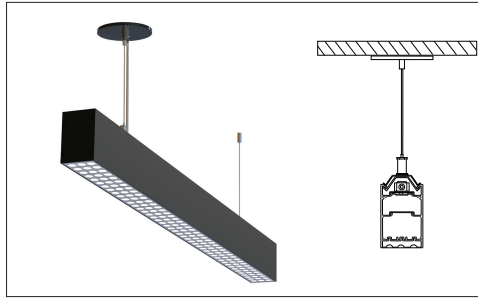


SUSPENDED

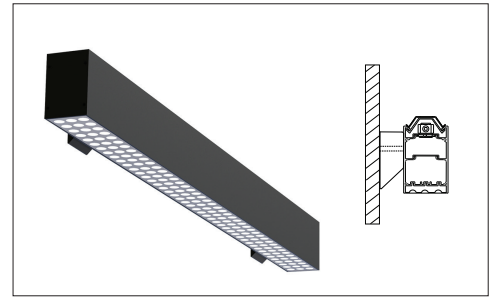


WALL MOUNT


BEAMS:



REGULAR BEAM



WIDE BEAM



SYMMETRIC BEAM



ASYMMETRIC BEAM