
FEATURES:

- ✓ Architectural luminaire with direct or indirect distribution.
- ✓ Light source: LED board (5.5"/11"/22"/24").
- ✓ Diffused illumination is provided by high efficiency frosted opal lens.
- ✓ Suitable for surface, suspended and recessed installations.
- ✓ Extruded aluminum body comes with white, black or grey finish.
- ✓ Also available with custom color options or vinyl decals.
- ✓ LED Strips are rated for 60,000hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

SPECIFICATION:
ED TRIANGLE+
 — — — — — — — — — —

Enter the order code into the boxes above.

- | | | | | |
|--|---|---|---|---|
| SIZE
<input type="checkbox"/> 2x2x2 Feet
<input type="checkbox"/> 3x3x3 Feet
<input type="checkbox"/> 4x4x4 Feet
<input type="checkbox"/> <input type="text"/> *
<small>*Specify required length.
**Custom angles are available.</small> | SOURCE
<input type="checkbox"/> 25WLED
<input type="checkbox"/> 50WLED
<input type="checkbox"/> 75WLED*
<small>* Available for 3 & 4 Feet.</small> | RADIANCE
<input type="checkbox"/> DD - Direct (100%Down)
<input type="checkbox"/> ID - Indirect (100%Up)**
<input type="checkbox"/> IL - In Lite
<input type="checkbox"/> OL - Out Lite
<small>*Light Distribution.
**Suspended Configuration only.</small> | VOLTAGE
<input type="checkbox"/> 120V
<input type="checkbox"/> 277V
<input type="checkbox"/> 347V*
<small>*Not available for all configurations.</small> | DRIVER
<input type="checkbox"/> ST - Standard
<input type="checkbox"/> DL - 0-10V Dimming (1%)
<input type="checkbox"/> DA - DALI
<input type="checkbox"/> <input type="text"/> *
<small>* Please specify dimming method (ELV).</small> |
|--|---|---|---|---|

- | | | | | |
|---|---|--|--|--|
| MOUNTING
<input type="checkbox"/> S4-Suspension 4Feet
<input type="checkbox"/> S6-Suspension 6Feet
<input type="checkbox"/> S <input type="text"/> Feet*
<input type="checkbox"/> WM - Wall Mount
<input type="checkbox"/> SF - Surface Mount
<input type="checkbox"/> RT - Recessed Trimless
<small>*Please specify required Length.</small> | LENS
<input type="checkbox"/> OP - Opal | FINISH
<input type="checkbox"/> WH - White
<input type="checkbox"/> BK - Black
<input type="checkbox"/> GR - Grey
<input type="checkbox"/> CF - Custom <input type="text"/> RAL#
<input type="checkbox"/> VD - Vinyl Decal*
<small>* Please provide 600dpi Image.</small> | CCT
<input type="checkbox"/> 30K - 3000Kelvin/90CRI
<input type="checkbox"/> 35K - 3500Kelvin/90CRI
<input type="checkbox"/> 40K - 4000Kelvin/90CRI
<input type="checkbox"/> TW - Tunable White** (2700K-6500K)
<small>*Other options are available.
**Available with Dali controls.</small> | OPTIONS
<input type="checkbox"/> No Options*
<input type="checkbox"/> DS-Daylight Sensor
<input type="checkbox"/> DC - Dual Circuit**
<input type="checkbox"/> OS - Occupancy Sensor
<input type="checkbox"/> DOS - Daylight & Occupancy Sensor
<small>*Leave Empty.
**Down /Up Control separately.</small> |
|---|---|--|--|--|

LUMEN OUTPUT:


Watts	30K	35K	40K
25W	2610 lm	2650 lm	2690 lm
50W	5150 lm	5250 lm	5380 lm
75W	7720 lm	7875 lm	8030 lm



Project:

Type:

SIZE:

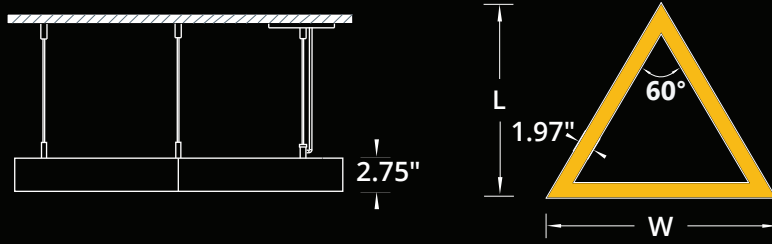

Size	LxW
2x2x2 Feet	22.86x26.40 Inch
3x3x3 Feet	32.39x37.40 Inch
4x4x4 Feet	41.92x48.40 Inch

RADIANCE:


DIRECT DISTRIBUTION




DIRECT DISTRIBUTION




MOUNTING:

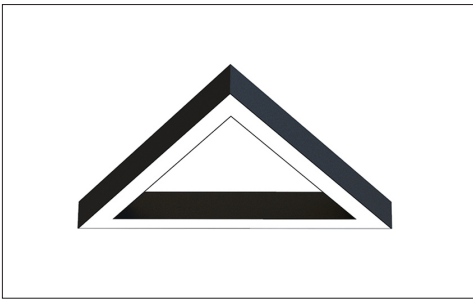


SURFACE MOUNT

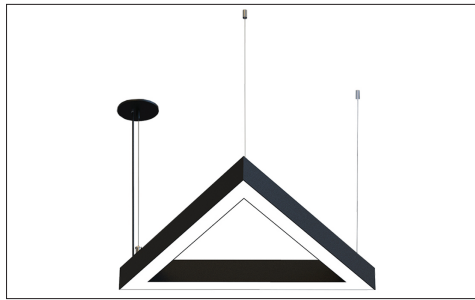


SUSPENDED

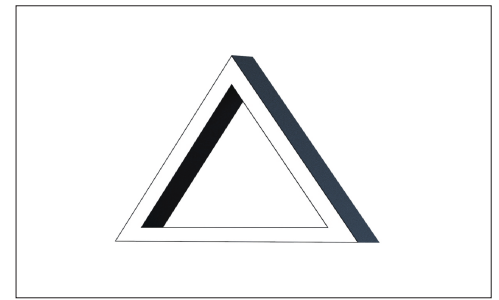

WALL MOUNT

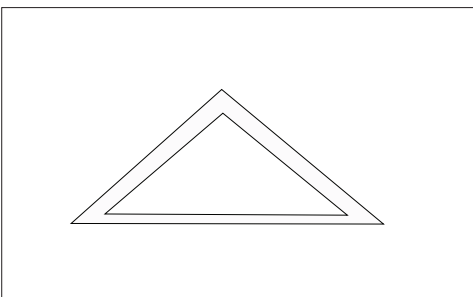

RECESSED TRIMLESS

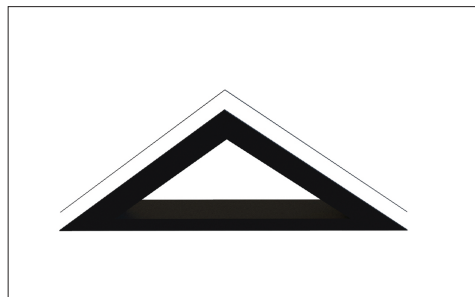

OUT-LITE



IN-LITE