

**FEATURES:**

- ✓ Architectural luminaire with direct lighting distribution.
- ✓ Light source: COB LED.
- ✓ High efficiency metalized integral reflector is available with 15° Spot, 25° Narrow Flood or 40° Flood Beam angle.
- ✓ Available with optional flat frame plate for NC installation.
- ✓ Suitable for recessed insulated ceilings or damp locations.
- ✓ Round adjustable trim can rotate 350° or tilted up to 30°.
- ✓ LED spot is rated for 60,000hrs. L70 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

**SPECIFICATION:**

**ED AR+**



Enter the Product Code into the boxes above.

**SOURCE**

- 8W LED
- 12W LED

**VOLTAGE**

- 120V
- 277V
- 347V\*

\*External step down transformer per luminaire.

**DRIVER**

- ST - Standard
- DL - 0-10V Dimming
- DT - TRIAC
- \*

\* Please specify dimming method.

**MOUNTING**


- RT -Retrofit
- NC- New Const. Plate

**REFLECTOR**

- SP - Spot
- NF - Narrow Flood
- FL - Flood

**LOUVER**

- WH - White
- BK - Black
- SL - Silver
- CH - Chrome
- CD - Chrome Dark
- CG - Chrome Gold

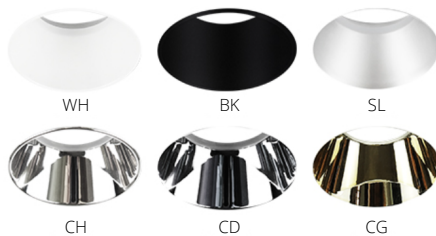

**TRIM**

- WH - White
- BK - Black

**CCT**

- 30K - 3000Kelvin/90CRI
- 35K - 3500Kelvin/90CRI
- 40K - 4000Kelvin/90CRI


\*Other options are available.

**DIMENSIONS:**

Height	Width	Cut Out
3.625"	3.36"	2.937"

**LUMEN OUTPUT:**

Watts	30K	35K	40K
8W	700 lm	720 lm	740 lm
12W	1050 lm	1080 lm	1110 lm

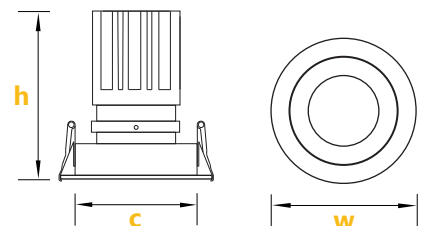


Project:

Type:



**DRIVER BOX:**

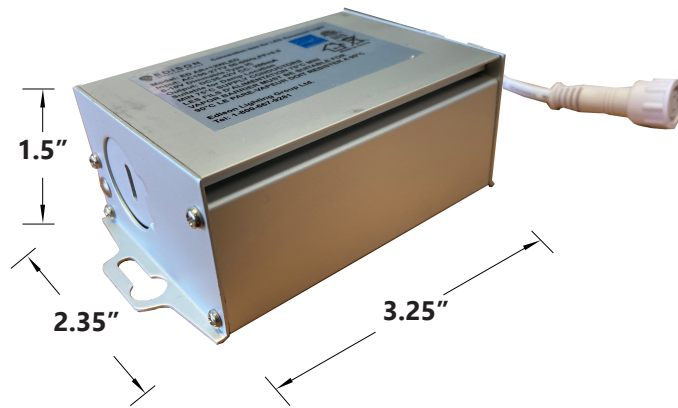

**NC PLATE:**

