
**FEATURES:**

- ✓ Architectural linear luminaire with direct or direct/indirect distribution.
- ✓ Light source: BIOS SkyBlue LED board (5.5"/11"/22").
- ✓ Circadian lighting technology with highest melanopic ratio improves daytime alertness, mood, productivity and brain function.
- ✓ Diffused illumination is provided by high efficiency frosted opal lens.
- ✓ Suitable for surface, suspended and recessed installations.
- ✓ Extruded aluminum body comes with white, black or grey finish.
- ✓ LED Strips are rated for 50,000hrs. L80 with +90 CRI.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

**SPECIFICATION:**

**ED VERTEX+**  -  -  -  -  -  -  -  -  -  -

Enter the Product Code into the boxes above.

**SIZE**

- 2x2 Feet
- 3x3 Feet
- 4x4 Feet
- \*

\*Specify required length.  
 \*\* Custom angles are available.

**SOURCE**

- 25WLED
- 50WLED
- 75WLED\*

\* Available for 3 & 4 Feet.

**RADIANCE**

- DD - Direct (100%Down)
- ID - Indirect (100%Up)\*\*

\*Light Distribution.  
 \*\*Suspended Configuration only.

**VOLTAGE**

- 120V
- 277V
- 347V\*

\*Not available for all configurations.

**DRIVER**

- ST - Standard
- DL - 0-10V Dimming (1%)
- DA - DALI
- \*

\*Please specify dimming method (ELV)

**MOUNTING**

- S4-Suspension 4Feet
- S6-Suspension 6Feet
- S  Feet\*
- WM - Wall Mount
- SF - Surface Mount
- RT - Recessed Trimless

\*Please specify required Length.

**LENS**

- OP - Opal

**FINISH**

- WH - White
- BK - Black
- GR - Grey
- CF - Custom  RAL#
- VD - Vinyl Decal\*

\* Please provide 600dpi image.

**CCT**

- 30K - 3000Kelvin/90CRI
- 35K - 3500Kelvin/90CRI
- 40K - 4000Kelvin/90CRI
- TW - Tunable White\*\*  
(2700K-5600K)

\*Other options are available.  
 \*\*Available with Dali controls.

**OPTIONS**

- No Options\*
- DS - Daylight Sensor
- DC - Dual Circuit\*\*
- OS - Occupancy Sensor
- DOS - Daylight & Occupancy Sensor

\*Leave Empty.  
 \*\*Down /Up Control separately.

**LUMEN OUTPUT:**

Watts	30K	35K	40K
25W	2610 lm	2650 lm	2690 lm
50W	5150 lm	5250 lm	5380 lm
75W	7720 lm	7875 lm	8030 lm




Declare.

Project:

Type:

**SIZE:**

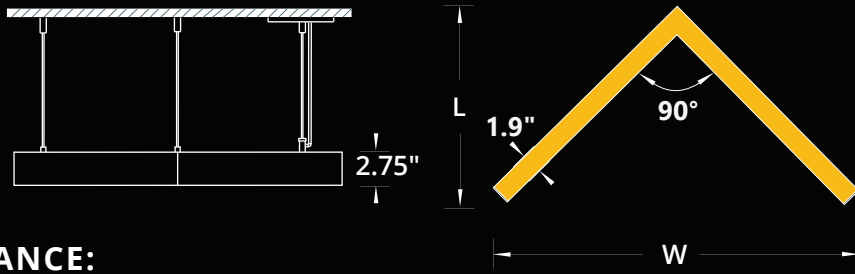

Size	LxW
2x2 Feet	18.00x33.40 Inch
3x3 Feet	25.80x48.97 Inch
4x4 Feet	33.57x64.54 Inch

**RADIANCE:**

**DIRECT DISTRIBUTION**




↓ 100%

**INDIRECT DISTRIBUTION**




↑ 100%


**MOUNTING:**

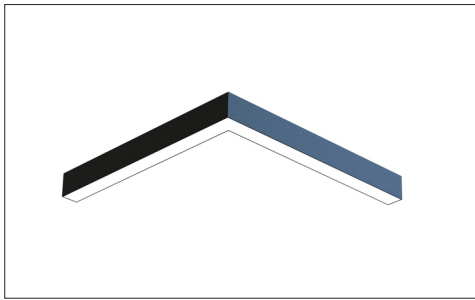


**SURFACE MOUNT**

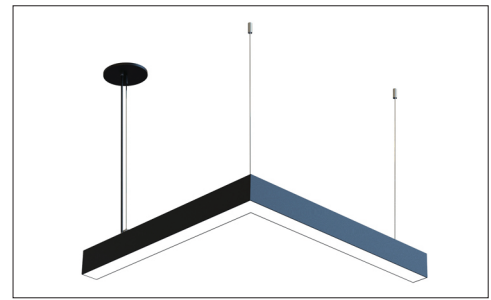

**SUSPENDED**

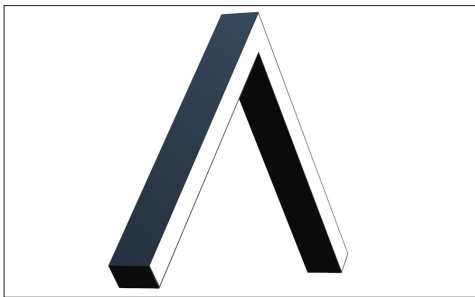

**WALL MOUNT**

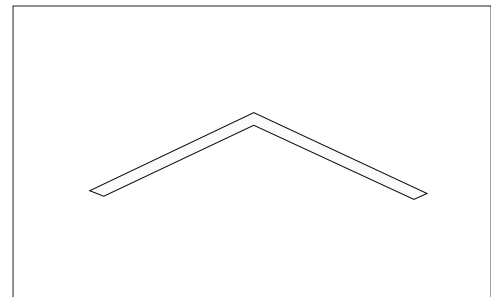

**RECESSED TRIMLESS**