

### FEATURES:

- ✓ Architectural luminaire with direct or direct-indirect distribution.
- ✓ Light source: LED board (5.5"/11"/22"/24").
- ✓ Diffused illumination is provided by high efficiency frosted opal lens.
- ✓ Suitable for surface, suspended and recessed installations.
- ✓ Extruded aluminum body comes with white, black or grey finish.
- ✓ Also available with custom color options.
- ✓ LED Strips are rated for 60,000hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

### SPECIFICATION:

**ED SQUARE+**  -  -  -  -  -  -  -  -  -  -

Enter the order code into the boxes above.

#### SIZE

- 2x2 Feet
- 3x3 Feet
- 4x4 Feet
- \*

\*Specify required size.

#### SOURCE

- 25WLED
- 50WLED
- 75WLED\*

\* Available for 3 & 4 Feet.

#### RADIANCE

- DD - Direct (100%Down)
- ID - Indirect (100%Up)\*\*
- UD - Uneven (70%Down/30%Up)\*\*
- IL - Inner Lit (100% Inward)
- OL - Outer Lit (100%Outward)

\*Light Distribution.  
\*\*Suspended Configuration only.

#### VOLTAGE

- 120V
- 277V
- 347V\*

\*Not available for all configurations.

#### DRIVER

- ST - Standard (Non-Dimming)
- DL - 0-10V Dimming (1%)
- DA - DALI
- \*

\* Please specify dimming method (ELV).

#### MOUNTING

- S4-Suspension 4Feet
- S6-Suspension 6Feet
- S  Feet\*
- WM - Wall Mount
- SF - Surface Mount
- RT - Recessed Trimless

\*Please specify required Length.

#### LENS

- OP - Opal

#### FINISH

- WH - White
- BK - Black
- GR - Grey
- CF - Custom

#### CCT

- 30K - 3000Kelvin/90CRI
- 35K - 3500Kelvin/90CRI
- 40K - 4000Kelvin/90CRI
- TW - Tunable White\*\* (2700K-6500K)

\*Other options are available.  
\*\*Available with Dali controls.

#### OPTIONS

- No Options\*
- DS-Daylight Sensor
- DC - Dual Circuit\*\*
- OS - Occupancy Sensor
- DOS - Daylight & Occupancy Sensor

\*Leave Empty.  
\*\*Down /Up Control separately.

### LUMEN OUTPUT:

Watts	30K	35K	40K
25W	2610 lm	2650 lm	2690 lm
50W	5150 lm	5250 lm	5380 lm
75W	7720 lm	7875 lm	8030 lm




Declare.

Project:

Type:

**SIZE:**

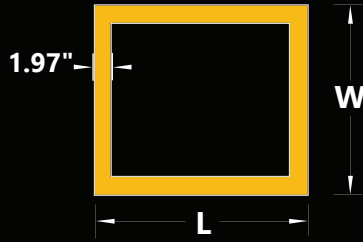

Size	Width x Length
2 Feet	24.50x24.50 Inch
3 Feet	35.50x35.50 Inch
4 Feet	46.50x46.50 Inch

**RADIANCE:**


**DIRECT DISTRIBUTION**




**UNEVEN DISTRIBUTION**




**MOUNTING:**

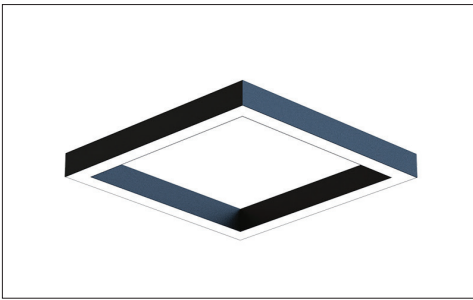


SURFACE MOUNT

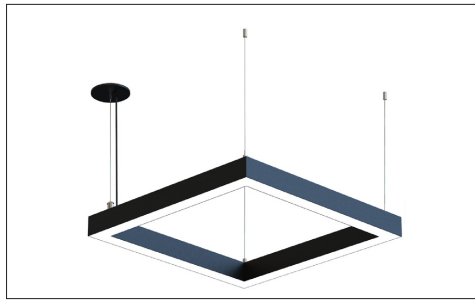


SUSPENDED

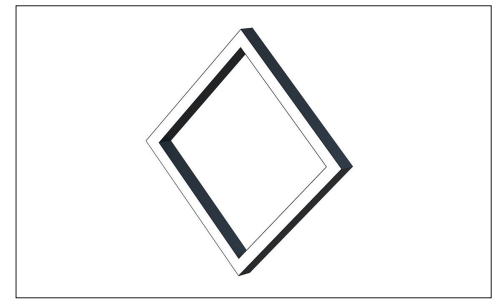


WALL MOUNT

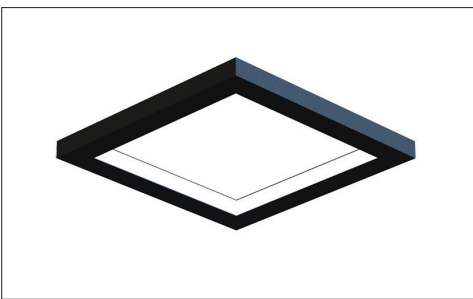

INNER LIT

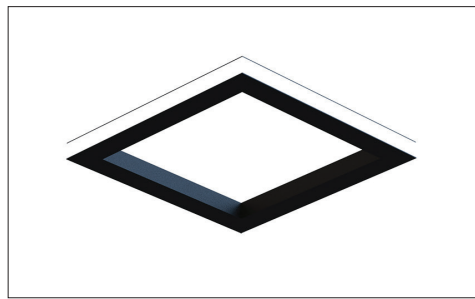

OUTER LIT

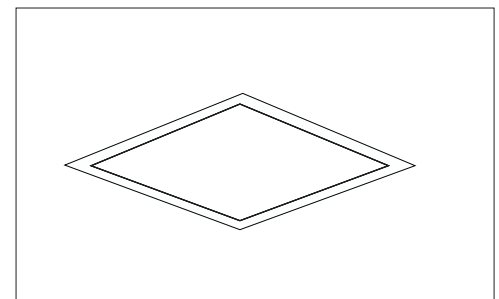

RECESSED TRIMLESS