




FEATURES:

- Architectural acoustic luminaire with direct lighting distribution.
- Light source: LED Board (5.5"/11"/22"/24").
- Diffused illumination is provided by frosted opal lens.
- Extruded aluminum body comes with built-in-driver and available in white, black or grey finish.
- Removable fin shaped Eco-Felt baffles are attached to the acoustic top plate.
- Available in one standard size with various baffle heights.
- Class1 Fire rated with 0.7 Noise Reduction Coefficient / 1" Acoustic.
- LED Strips are rated for 60,000hrs. L80 with +90 CRI.
- Suitable for suspended installations.
- Custom finished and modifications are available.
- ED luminaires are certified to CSA and UL Standards. reinventlight

SPECIFICATION:

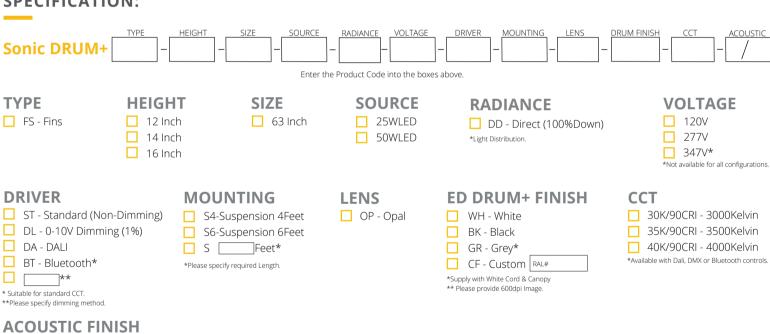



LUMEN OUTDUT.

LUMEN OUTPUT.			
Watts	30K	35K	40K
25W	2205 lm	2250 lm	2295 lm
50W	4410 lm	4500 lm	4590 lm









Declare.



905-830-0339 / 1-800-667-9281




info@edisonlighting.ca



www.edisonlighting.ca





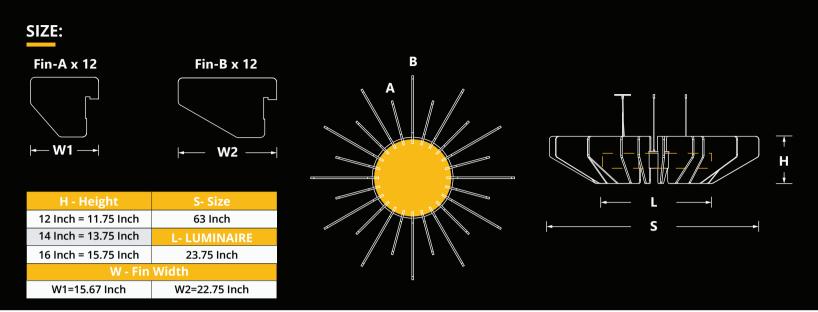

FINISHES:

