

## FEATURES:

- ✓ Architectural sound absorbing Eco Felt Acoustic panel.
- ✓ Made from recyclable plastic material available in different thicknesses.
- ✓ Class1 Fire rated with 0.7 Noise Reduction Coefficient/1" Acoustic.
- ✓ Light source: LED 5.5"Board.
- ✓ Diffused illumination is provided by high efficiency frosted opal lens.
- ✓ Extruded aluminum body comes with built-in-driver and available in white, black or grey finish.
- ✓ Also available with custom colour options.
- ✓ LED Strips are rated for 60,000hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards. **reinventlight**

## SPECIFICATION:


**Sonic CURVE+**  -  -  -  -  -  -  -  -  -  -  -  -

Enter the Product Code into the boxes above.

<b>TYPE</b> <input type="checkbox"/> FV - Flush Vcut <input type="checkbox"/> FR - Flush Regular <input type="checkbox"/> <input type="text"/> * <small>*Please specify custom type.</small>	<b>HEIGHT</b> <input type="checkbox"/> 12 Inch <input type="checkbox"/> 16 Inch <input type="checkbox"/> 24 Inch	<b>SIZE</b> <input type="checkbox"/> 40 Inch <input type="checkbox"/> 50 Inch	<b>SOURCE</b> <input type="checkbox"/> 20WLED <input type="checkbox"/> 30WLED	<b>RADIANCE</b> <input type="checkbox"/> DD - Direct (100%Down) <small>*Light Distribution.</small>	<b>VOLTAGE</b> <input type="checkbox"/> 120V <input type="checkbox"/> 277V <input type="checkbox"/> 347V* <small>*Not available for all configurations.</small>
--	---	---	---	---	---

<b>DRIVER</b> <input type="checkbox"/> ST - Standard (Non-Dimming) <input type="checkbox"/> DL - 0-10V Dimming (1%) <input type="checkbox"/> DA - DALI <input type="checkbox"/> BT - Bluetooth <input type="checkbox"/> <input type="text"/> * <small>*Please specify dimming method.</small>	<b>MOUNTING</b> <input type="checkbox"/> S4-Suspension 4Feet <input type="checkbox"/> S6-Suspension 6Feet <input type="checkbox"/> S <input type="text"/> Feet* <small>*Please specify required Length.</small>	<b>LENS</b> <input type="checkbox"/> OP - Opal	<b>ED CURVE+ FINISH</b> <input type="checkbox"/> WH - White <input type="checkbox"/> BK - Black <input type="checkbox"/> GR - Grey* <input type="checkbox"/> CF - Custom <input type="text"/> RAL# <small>*Supply with White Cord &amp; Canopy          ** Please provide 600dpi Image.</small>	<b>CCT</b> <input type="checkbox"/> 30K/90CRI - 3000Kelvin <input type="checkbox"/> 35K/90CRI - 3500Kelvin <input type="checkbox"/> 40K/90CRI - 4000Kelvin <small>*Available with Dali, DMX or Bluetooth controls.</small>
---	---	---	--	--

## ACOUSTIC FINISH

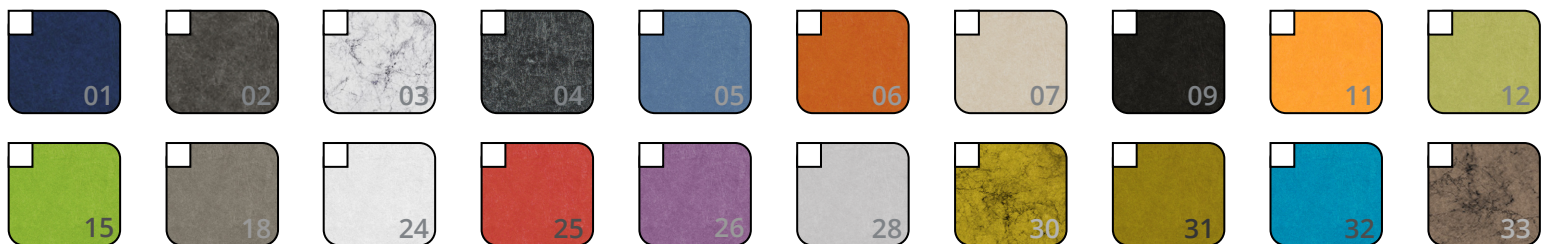

## LUMEN OUTPUT:


Watts	30K	35K	40K
20W	2070 lm	2125 lm	2180 lm
30W	3065 lm	3150 lm	3235 lm



Project:

Type:


SIZE:

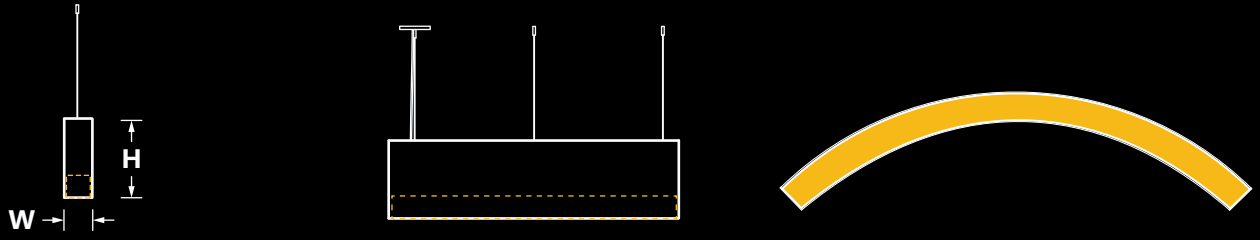


FR-FLUSH REGULAR

H - Height	W-Width
12 Inch = 11.75 Inch	3.875 Inch
16 Inch = 15.75 Inch	
24 Inch = 23.75 Inch	


FLUSH VCUT-FINISHES:




#25



#32




#15




#26


FLUSH REGULAR-FINISHES:




#25



#32



#15



#26