

## FEATURES:

- ✓ Architectural sound absorbing Eco Felt Acoustic panel.
- ✓ Made from recyclable plastic material available in different thicknesses.
- ✓ Class1 Fire rated with 0.7 Noise Reduction Coefficient/1" Acoustic.
- ✓ Light source: COB LED.
- ✓ High efficiency integral reflector combined with opal lens insert provides excellent lighting distribution.
- ✓ Square internal louver is available in a wide range of finishes.
- ✓ Aluminum body of the luminaire comes with built-in-driver.
- ✓ LED Spot is rated for 60,000hrs. L70 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards. **reinventlight**

## SPECIFICATION:

**Sonic CUBIC+**


TYPE	HEIGHT	SIZE	SOURCE	RADIANCE	VOLTAGE	DRIVER	MOUNTING	LENS	CUBIC FINISH	CCT	ACOUSTIC
											/

Enter the Product Code into the boxes above.

<b>TYPE</b> <input type="checkbox"/> RS - Rectangle	<b>HEIGHT</b> <input type="checkbox"/> 12 Inch <input type="checkbox"/> 16 Inch <input type="checkbox"/> 24 Inch	<b>SOURCE</b> <input type="checkbox"/> 15W LED <input type="checkbox"/> 20W LED <input type="checkbox"/> 25W LED	<b>RADIANCE</b> <input type="checkbox"/> DD - Direct (100%Down) <small>*Light Distribution.</small>	<b>VOLTAGE</b> <input type="checkbox"/> 120V <input type="checkbox"/> 277V
<b>DRIVER</b> <input type="checkbox"/> ST - Standard (Non-Dimming) <input type="checkbox"/> DL - 0-10V Dimming (1%) <input type="checkbox"/> DA - DALI <input type="checkbox"/> BT - Bluetooth* <input type="checkbox"/> <input type="text"/> **	<b>MOUNTING</b> <input type="checkbox"/> S4-Suspension 4Feet <input type="checkbox"/> S6-Suspension 6Feet <input type="checkbox"/> S <input type="text"/> Feet* <small>*Please specify required Length.</small>	<b>LOUVER</b> <input type="checkbox"/> WH - White <input type="checkbox"/> BK - Black	<b>ED CUBIC FINISH</b> <input type="checkbox"/> WH - White <input type="checkbox"/> BK - Black <input type="checkbox"/> GR - Grey* <small>*Supply with White Cord &amp; Canopy</small>	<b>CCT</b> <input type="checkbox"/> 30K/90CRI - 3000Kelvin <input type="checkbox"/> 35K/90CRI - 3500Kelvin <input type="checkbox"/> 40K/90CRI - 4000Kelvin <small>*Other options are available.</small>

\* Suitable for standard CCT.  
\*\*Please specify dimming method.

## ACOUSTIC FINISH\*

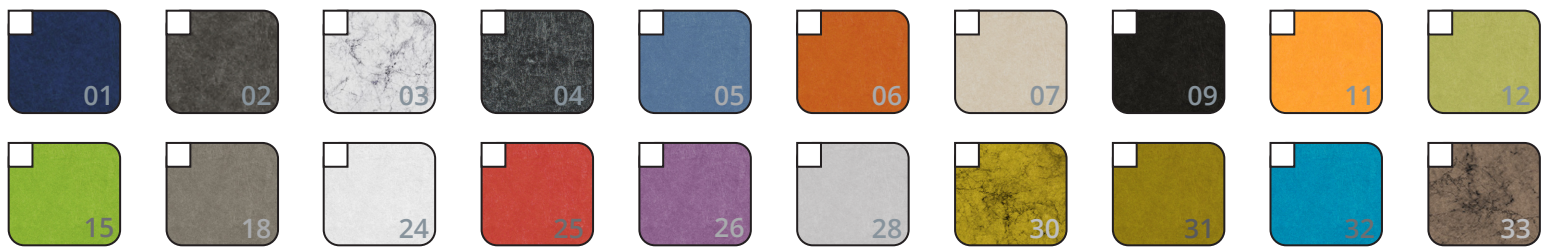

\* Please specify Acoustic Trim & Body finish, for example (09/26)

## LUMEN OUTPUT:

Watts	30K	35K	40K
15W	1400 lm	1430 lm	1460 lm
20W	1910 lm	1950 lm	1990 lm
25W	2350 lm	2400 lm	2450 lm





Project:

Type:

**SIZE:**

H - Height	Width	Length
12 Inch = 11.75 Inch	8.00 Inch	8.00 Inch
16 Inch = 15.75 Inch	8.00 Inch	8.00 Inch
24 Inch = 23.75 Inch	8.00 Inch	8.00 Inch

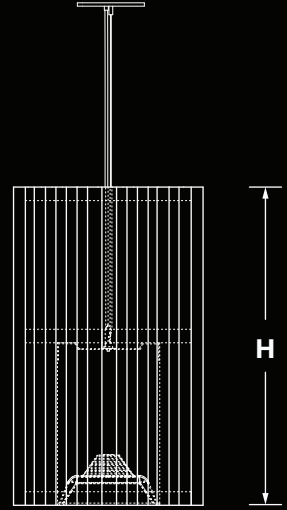

**FINISHES:**



(09/01)



(09/11)



(09/32)



(09/30)



(09/06)



(09/25)



(09/32)



(25/09)