



FEATURES:

- ✓ Architectural luminaire with direct or direct-indirect distribution.
- ✓ Light source: LED board (5.5"/11"/22"/24").
- ✓ Diffused illumination is provided by high efficiency frosted opal lens.
- ✓ Sleek body of the luminaire combines two aluminum side with laser cut metal top enclosure. Suitable for suspended and wall mounted installations.
- ✓ Extruded aluminum body comes with white, black or grey finish.
- ✓ Also available with custom color options.
- ✓ LED Strips are rated for 60,000hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

SPECIFICATION:

ED CURVE+ SIZE SOURCE RADIANCE VOLTAGE DRIVER MOUNTING LENS FINISH CCT OPTIONS

Enter the Product Code into the boxes above.

SIZE

- 40 Inch
- 50 Inch

SOURCE

- 20WLED
- 30WLED
- 40WLED*

*Available for 50Inch-Uneven Distribution only.

RADIANCE

- DD - Direct (100%Down)
- ID - Indirect (100%Up)**
- UD - Uneven(70%Down/30%Up)**

*Light Distribution.
**Suspended Configuration only.

VOLTAGE

- 120V
- 277V
- 347V*

*Not available for all configurations.

DRIVER

- ST - Standard (Non-Dimming)
- DL - 0-10V Dimming (1%)
- DA - DALI
- *

* Please specify dimming method (ELV).

MOUNTING

- S4-Suspension 4Feet
- S6-Suspension 6Feet
- S Feet*
- WM - Wall Mount
- SF - Surface Mount

*Please specify required Length.

LENS

- OP - Opal

FINISH

- WH - White
- BK - Black
- GR - Grey
- CF - Custom RAL#

CCT

- 30K - 3000Kelvin/90CRI
- 35K - 3500Kelvin/90CRI
- 40K - 4000Kelvin/90CRI
- TW - Tunable White** (2700K-6500K)

*Other options are available.
**Available with Dali controls.

OPTIONS

- No Options*
- DS-Daylight Sensor
- DC - Dual Circuit**
- OS - Occupancy Sensor
- DOS - Daylight & Occupancy Sensor

*Leave Empty.
**Down /Up Control separately.

LUMEN OUTPUT:



| Watts | 30K | 35K | 40K |
|-------|---------|---------|---------|
| 20W | 2070 lm | 2125 lm | 2180 lm |
| 30W | 3065 lm | 3150 lm | 3235 lm |
| 40W | 4086 lm | 4200 lm | 4313 lm |



Project:

Type:

SIZE:

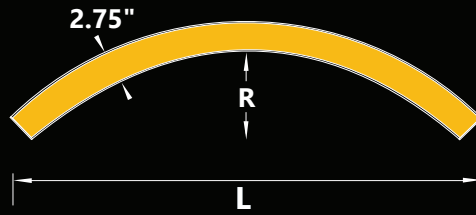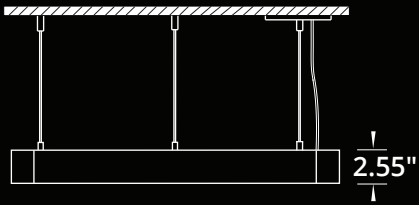

| Length | Radius |
|---------|---------|
| 40 Inch | 30 Inch |
| 50 Inch | 35 Inch |

RADIANCE:


DIRECT DISTRIBUTION




UNEVEN DISTRIBUTION




MOUNTING:

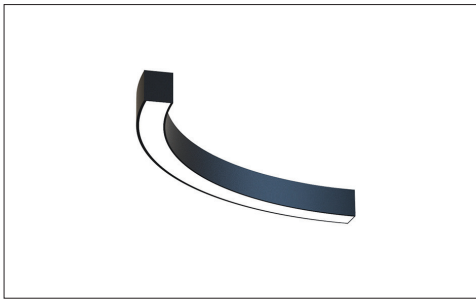

SURFACE MOUNT

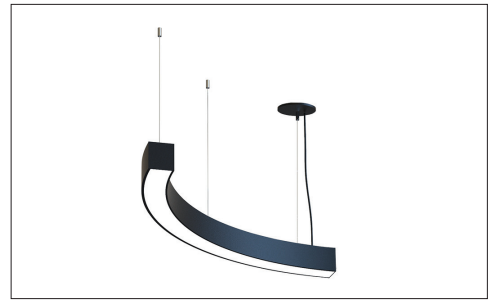

SUSPENDED

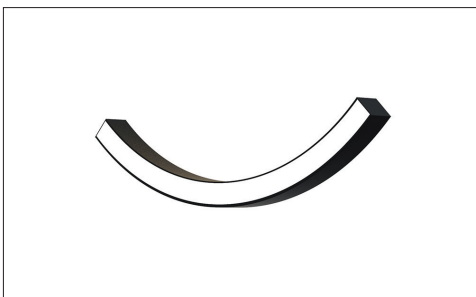

WALL MOUNT



CUSTOM - INFINITY