




FEATURES:

- ✓ Architectural luminaire with direct or direct-indirect distribution.
- ✓ Light source: LED 5.5" board.
- ✓ Diffused illumination is provided by high efficiency frosted opal lens.
- ✓ Sleek body of the luminaire combines two aluminum side with laser cut metal top enclosure.
- ✓ Suitable for suspended and wall mounted installations.
- ✓ Extruded aluminum body comes with white, black or grey finish.
- ✓ Also available with custom color options.
- ✓ LED Strips are rated for 60,000hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

SPECIFICATION:



- SIZE**
- 2 Feet
 - 3 Feet
 - 4 Feet
 - 5 Feet
- SOURCE**
- 25WLED
 - 50WLED
 - 75WLED*
- *Available for 4 & 5 Feet.
**Other Wattages are available.
- RADIANCE**
- DD - Direct (100%Down)
 - ID - Indirect (100%Up)**
 - UD - Uneven(70%Down/30%Up)**
- *Light Distribution.
**Suspended Configuration only.
- VOLTAGE**
- 120V
 - 277V
 - 347V*
- *Not available for all configurations.
- DRIVER**
- ST - Standard (Non-Dimming)
 - DL - 0-10V Dimming (1%)
 - DA - DALI
 - *
- * Please specify dimming method (ELV).

- MOUNTING**
- C4-Canopy 4Feet
 - C6-Canopy 6Feet
 - C Feet*
 - S4-Suspension 4Feet**
 - S6-Suspension 6Feet**
 - S Feet*
 - WM - Wall Mount**
 - SF - Surface Mount**
- *Please specify required Length.
**Remote Driver.
- LENS**
- OP - Opal
- FINISH**
- WH - White
 - BK - Black
 - GR - Grey
 - CF - Custom RAL#
- CCT**
- 30K - 3000Kelvin/90CRI
 - 35K - 3500Kelvin/90CRI
 - 40K - 4000Kelvin/90CRI
 - TW - Tunable White** (2700K-6500K)
- *Other options are available.
**Available with Dali controls.
- OPTIONS**
- No Options*
 - DS-Daylight Sensor
 - DC - Dual Circuit**
 - OS - Occupancy Sensor
 - DOS - Daylight & Occupancy Sensor
- *Leave Empty.
**Down /Up Control separately.

LUMEN OUTPUT:



Watts	30K	35K	40K
25W	2205 lm	2250 lm	2295 lm
50W	4410 lm	4500 lm	4590 lm
75W	6610 lm	6750 lm	6890 lm



Project:

Type:

SIZE:

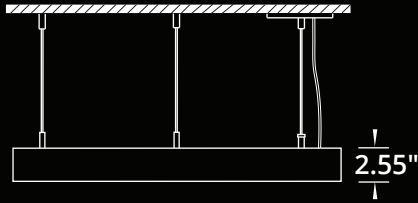

Size	Diameter
2 Feet	23.60 Inch
3 Feet	35.40 Inch
4 Feet	47.20 Inch
5 Feet	59.00 Inch

RADIANCE:

DIRECT DISTRIBUTION



UNEVEN DISTRIBUTION



MOUNTING:



SUSPENDED - CEILING CANOPY




SUSPENDED - STRAIGHT WIRE*

*Remote Driver.



SURFACE MOUNT*

*Remote Driver.

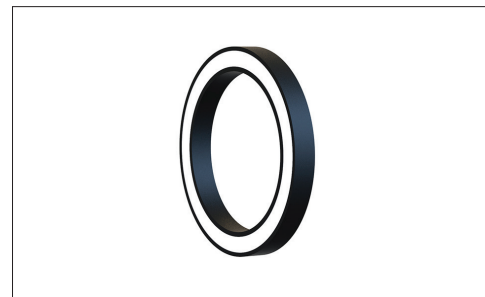

WALL MOUNT*

*Remote Driver.