



FEATURES:

- ✓ Architectural sound absorbing Eco Felt Acoustic panel.
- ✓ Made from recyclable plastic material available in different thicknesses.
- ✓ Class1 Fire rated with 0.7 Noise Reduction Coefficient / 1" Acoustic.
- ✓ Light source: LED Board (5.5"/11"/22"/24").
- ✓ Diffused illumination is provided by frosted opal lens.
- ✓ Extruded aluminum body comes with built-in-driver and available in white, black or grey finish.
- ✓ Also available with custom colour options.
- ✓ LED Strips are rated for 60,000hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards. **reinventlight**

SPECIFICATION:

Sonic DRUM+ - - - - - - - - - - - - /

Enter the Product Code into the boxes above.

TYPE <input type="checkbox"/> BS - Bell	HEIGHT <input type="checkbox"/> 12 Inch <input type="checkbox"/> 16 Inch <input type="checkbox"/> 24 Inch	SIZE <input type="checkbox"/> 18 Inch <input type="checkbox"/> 30 Inch	SOURCE <input type="checkbox"/> 25WLED <input type="checkbox"/> 50WLED	RADIANCE <input type="checkbox"/> DD - Direct (100%Down) <small>*Light Distribution.</small>	VOLTAGE <input type="checkbox"/> 120V <input type="checkbox"/> 277V <input type="checkbox"/> 347V* <small>*Not available for all configurations.</small>
DRIVER <input type="checkbox"/> ST - Standard (Non-Dimming) <input type="checkbox"/> DL - 0-10V Dimming (1%) <input type="checkbox"/> DA - DALI <input type="checkbox"/> BT - Bluetooth* <input type="checkbox"/> <input type="text"/> **	MOUNTING <input type="checkbox"/> S4-Suspension 4Feet <input type="checkbox"/> S6-Suspension 6Feet <input type="checkbox"/> S <input type="text"/> Feet* <small>*Please specify required Length.</small>	LENS <input type="checkbox"/> OP - Opal	ED DRUM+ FINISH <input type="checkbox"/> WH - White <input type="checkbox"/> BK - Black <input type="checkbox"/> GR - Grey* <input type="checkbox"/> CF - Custom <input type="text"/> RAL# <small>*Supply with White Cord & Canopy ** Please provide 600dpi Image.</small>	CCT <input type="checkbox"/> 30K/90CRI - 3000Kelvin <input type="checkbox"/> 35K/90CRI - 3500Kelvin <input type="checkbox"/> 40K/90CRI - 4000Kelvin <small>*Available with Dali, DMX or Bluetooth controls.</small>	

* Suitable for standard CCT.

**Please specify dimming method.

ACOUSTIC FINISH



WOOL FELT FINISH



* Please specify Outside Acoustic & Inside Wool Felt Layer, for example (04/131)

LUMEN OUTPUT:



Watts	30K	35K	40K
25W	2205 lm	2250 lm	2295 lm
50W	4410 lm	4500 lm	4590 lm




Project:

Type:

SIZE:

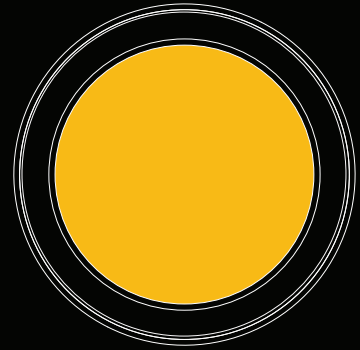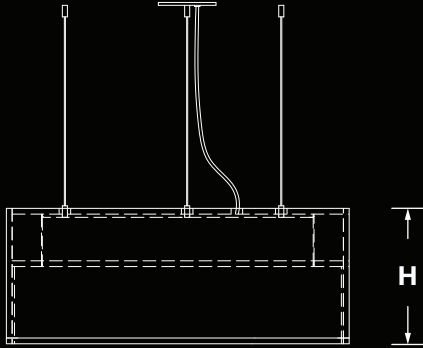

H - Height	S- SizeDiameter	L- Luminaire
12 Inch = 11.75 Inch	18 Inch = 17.75 Inch	13.00 Inch
16 Inch = 15.75 Inch	30 Inch = 29.75 Inch	23.75 Inch
24 Inch = 23.75 Inch		



FINISHES:



(04/181)



(04/151)



(04/164)



(04/133)



(04/121)



(04/131)



(04/145)



(04/183)