

## FEATURES:

- ✓ Architectural sound absorbing luminaire combining Eco Felt Polyester with 100% Merino Wool Felt.
- ✓ Made from recyclable material available in two standard sizes.
- ✓ Polyester is Class1 Fire rated with 0.7 Noise Reduction Coefficient/1" Acoustic.
- ✓ Light source: COB LED.
- ✓ High efficiency integral reflector combined with opal lens insert provides excellent lighting distribution with 40° Beam.
- ✓ Circular internal louver is available in a wide range of finishes.
- ✓ Aluminum body of the luminaire comes with built-in-driver.
- ✓ LED Spot is rated for 60,000hrs. L70 with + 90CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

## SPECIFICATION:

Subsonic TUBE+  -  -  -  -  -  -  -  -  -  -  -

Enter the Product Code into the boxes above.

### TYPE

- SS - Standard

### HEIGHT

- 12 Inch
- 16 Inch

### SOURCE

- 15W LED
- 20W LED
- 25W LED

### RADIANCE

- DD - Direct (100%Down)
- \*Light Distribution.

### VOLTAGE

- 120V
- 277V

### DRIVER

- ST - Standard (Non-Dimming)
- DL - 0-10V Dimming (1%)
- DA - DALI
- BT - Bluetooth\*
- \*\*

\* Suitable for standard CCT.  
\*\*Please specify dimming method.

### MOUNTING

- S4-Suspension 4Feet
- S6-Suspension 6Feet
- S  Feet\*

\*Please specify required Length.

### LOUVER

- WH - White
- BK - Black
- SL - Silver

### TUBE FINISH

- WH - White
- BK - Black
- SL - Silver\*

\*Supply with White Cord & Canopy

### CCT

- 30K/90CRI - 3000Kelvin
- 35K/90CRI - 3500Kelvin
- 40K/90CRI - 4000Kelvin

\*Other options are available.

## POLYESTER - BASE LAYER



## WOOL FELT - TOP LAYER



\* Please specify Top Layer & Base Layer, For example (145/04)

## LUMEN OUTPUT:

Watts	30K	35K	40K
15W	1400 lm	1430 lm	1460 lm
20W	1910 lm	1950 lm	1990 lm
25W	2350 lm	2400 lm	2450 lm



Declare.


Project:

Type:


**SIZE:**

H - Height	Diameter
12 Inch = 11.75 Inch	16.00 Inch
16 Inch = 15.75 Inch	20.00 Inch


**VIEW:**



TOP



BOTTOM

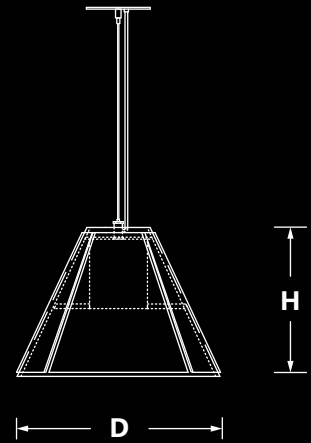

**COLOR EXAMPLES:**



(02/151)



(02/131)



(02/181)



(02/111)



(03/133)



(03/145)



(09/121)



(09/164)