



### FEATURES:

- ✓ Architectural sound absorbing Eco Felt Acoustic panel.
- ✓ Made from recyclable plastic material available in different thicknesses.
- ✓ Class1 Fire rated with 0.7 Noise Reduction Coefficient/1" Acoustic.
- ✓ Light source: LED Board (5.5"/11"/22"/24").
- ✓ Diffused illumination is provided by high efficiency frosted opal lens.
- ✓ Extruded aluminum body comes with built-in-driver and available in white, black or grey finish.
- ✓ Also available with custom colour options.
- ✓ LED Strips are rated for 60,000hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards. **reinventlight**

### SPECIFICATION:

**Sonic TRIAD+**  -  -  -  -  -  -  -  -  -  -  -  -

Enter the Product Code into the boxes above.

#### TYPE

- FV - Flush Vcut
- FR - Flush Regular
- \*

\*Please specify custom type.

#### HEIGHT

- 12 Inch
- 16 Inch
- 24 Inch

#### SIZE

- 2x2x2 Feet
- 3x3x3 Feet
- 4x4x4 Feet
- \*

\* Specify required length.  
\*\* Custom angles are available.

#### RADIANCE

- DD - Direct (100%Down)

\*Light Distribution.

#### SOURCE

- 25WLED
- 50WLED
- 75WLED\*

\* Available for 3 & 4 Feet sizes.

#### VOLTAGE

- 120V
- 277V
- 347V\*

\*Not available for all configurations.

#### DRIVER

- ST - Standard (Non-Dimming)
- DL - 0-10V Dimming (1%)
- DA - DALI
- BT - Bluetooth\*
- \*\*

\* Suitable for standard CCT or RGBW  
\*\*Please specify dimming method.

#### MOUNTING

- S4-Suspension 4Feet
- S6-Suspension 6Feet
- S Feet\*

\*Please specify required Length.

#### LENS

- OP - Opal

#### ED TRIAD+ FINISH

- WH - White
- BK - Black
- GR - Grey\*
- CF - Custom RAL#


\*Supply with White Cord & Canopy  
\*\* Please provide 600dpi Image.

#### CCT

- 30K/90CRI - 3000Kelvin
- 35K/90CRI - 3500Kelvin
- 40K/90CRI - 4000Kelvin
- RGBW
- TW - Tunable White\*\*  
(2700K-6500K)

\*Available with Dali, DMX or Bluetooth controls.  
\*\*Available with 0-10V,Dali or Bluetooth controls.

### ACOUSTIC FINISH

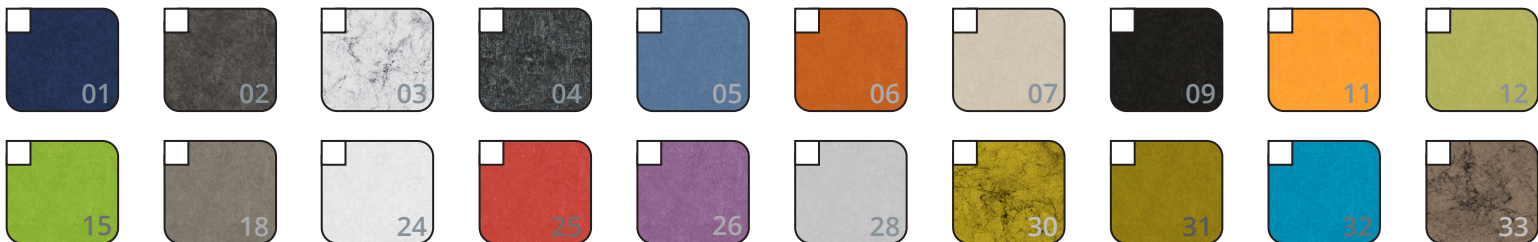

### LUMEN OUTPUT:


Watts	30K	35K	40K
25W	2610 lm	2650 lm	2690 lm
50W	5150 lm	5250 lm	5380 lm
75W	7720 lm	7875 lm	8030 lm




Project:

Type:

**SIZE:**

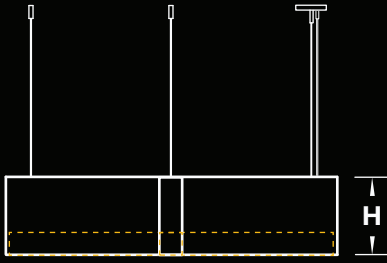


**FR-FLUSH REGULAR**

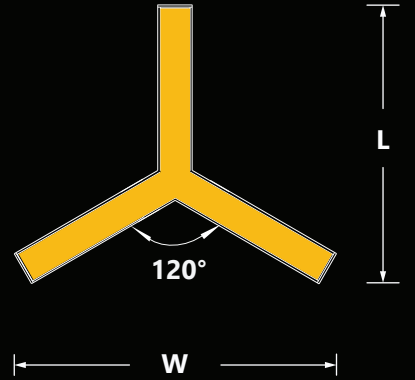


H - Height	Size	L x W
12 Inch = 11.75 Inch	2x2x2 Feet	35.90 x 41.52 Inch
16 Inch = 15.75 Inch	3x3x3 Feet	52.61 x 60.72 Inch
24 Inch = 23.75 Inch	4x4x4 Feet	69.14 x 79.83 Inch


**FLUSH VCUT-FINISHES:**




#06



#15




#25




#26


**FLUSH REGULAR-FINISHES:**




#06



#15



#25



#26