

FEATURES:

- ✓ Architectural luminaire with direct or indirect distribution.
- ✓ Light source: LED board (5.5"/11"/22"/24").
- ✓ Diffused illumination is provided by high efficiency frosted opal lens.
- ✓ Suitable for surface, suspended and recessed installations.
- ✓ Extruded aluminum body comes with white, black or grey finish.
- ✓ Also available with custom color options or vinyl decals.
- ✓ LED Strips are rated for 60,000hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

SPECIFICATION:

ED TRIAD+

SIZE — SOURCE — RADIANCE — VOLTAGE — DRIVER — MOUNTING — LENS — FINISH — CCT — OPTIONS

Enter the Product Code into the boxes above.

- SIZE**
- 2x2x2 Feet
 - 3x3x3 Feet
 - 4x4x4 Feet
 - *
- * Specify required length.
** Custom angles are available.
- SOURCE**
- 25WLED
 - 50WLED
 - 75WLED*
- * Available for 3 & 4 Feet.
- RADIANCE**
- DD - Direct (100%Down)
 - ID - Indirect (100%Up)**
- *Light Distribution.
**Suspended Configuration only.
- VOLTAGE**
- 120V
 - 277V
 - 347V*
- *Not available for all configurations.
- DRIVER**
- ST - Standard
 - DL - 0-10V Dimming (1%)
 - DA - DALI
 - *
- * Please specify dimming method (ELV).

- MOUNTING**
- S4-Suspension 4Feet
 - S6-Suspension 6Feet
 - S Feet*
 - WM - Wall Mount
 - SF - Surface Mount
 - RT - Recessed Trimless
- *Please specify required Length.
- LENS**
- OP - Opal
- FINISH**
- WH - White
 - BK - Black
 - GR - Grey
 - CF - Custom RAL#
 - VD - Vinyl Decal*
- * Please provide 600dpi Image.
- CCT**
- 30K - 3000Kelvin/90CRI
 - 35K - 3500Kelvin/90CRI
 - 40K - 4000Kelvin/90CRI
 - TW - Tunable White** (2700K-6500K)
- *Other options are available.
**Available with Dali controls.
- OPTIONS**
- No Options*
 - DS-Daylight Sensor
 - DC - Dual Circuit**
 - OS - Occupancy Sensor
 - DOS - Daylight & Occupancy Sensor
- *Leave Empty.
**Down /Up Control separately.

LUMEN OUTPUT:


Watts	30K	35K	40K
25W	2610 lm	2650 lm	2690 lm
50W	5150 lm	5250 lm	5380 lm
75W	7720 lm	7875 lm	8030 lm



Project:

Type:

SIZE:

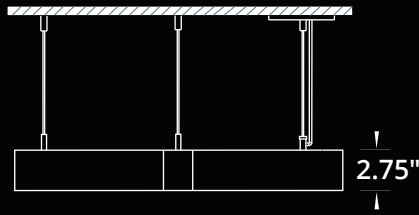

Size	L x W
2x2x2 Feet	34.706 x 40.056 Inch
3x3x3 Feet	51.206 x 59.105 Inch
4x4x4 Feet	67.706 x 78.154 Inch

RADIANCE:


DIRECT DISTRIBUTION




INDIRECT DISTRIBUTION



MOUNTING:

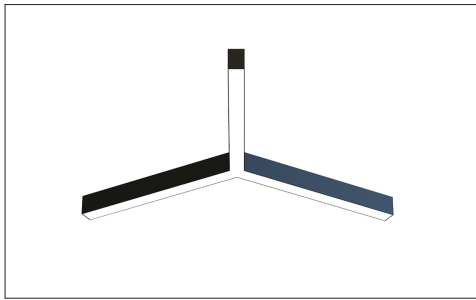


SURFACE MOUNT

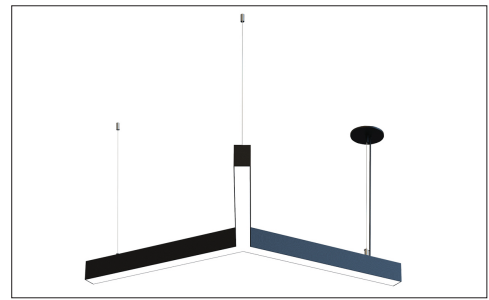

SUSPENDED



WALL MOUNT

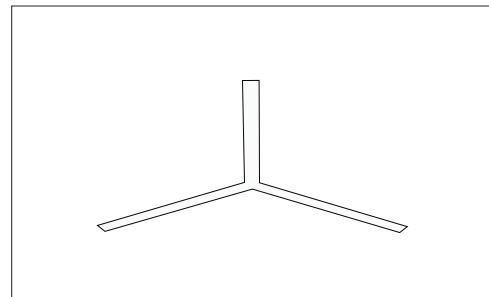

RECESSED TRIMLESS